

DECLARAÇÃO DE DESEMPENHO

DoP número: **MKT-1.3-100_pt**

✧ Código de identificação único do produto-tipo: **Parafuso de concreto BSZ**

✧ Utilização(ões) prevista(s): **Âncoras mecânica para uso em concreto, ver Anexo B / Annex B**

✧ Fabricante: **MKT Metall-Kunststoff-Technik GmbH & Co.KG
Auf dem Immel 2
67685 Weilerbach**

1

✧ Sistemas de avaliação e verificação da regularidade:

**EAD 330011-00-0601 + EAD 330232-00-0601
ETA-16/0204, 27.11.2020
DIBt, Berlin
Organismo(s) notificado (s): NB 2873 – Technische Universität Darmstadt**

✧ Desempenho(s) declarado(s):

Características essenciais	Desempenho
Resistência mecânica e estabilidade (BWR 1)	
Resistências características sob carga de tração (efeitos estáticos e quase-estáticos)	Anexo / Annex C1
Resistências características sob tensão transversal (efeitos estáticos e quase-estáticos)	Anexo / Annex C1
Resistência característica e deslocamentos para a categoria de desempenho sísmico C1 + C2	Anexo / Annex C2, C3, C4, C7
Deslocamentos (efeitos estáticos e quase-estáticos)	Anexo / Annex C6
Durabilidade	Anexo / Annex B1
Segurança contra incêndio (BWR 2)	
Comportamento do fogo	Classe A1
Resistência ao fogo	Anexo / Annex C5

O desempenho do produto identificado acima está em conformidade com o conjunto de desempenhos declarados. A presente declaração de desempenho é emitida, em conformidade com o Regulamento (EU) n.o 305/2011, sob a exclusiva responsabilidade do fabricante identificado acima.

Assinado por e em nome do fabricante por:



Stefan Weustenhausen
(Diretor-gerente)
Weilerbach, 27.11.2020

p.p. 

Dipl.-Ing. Detlef Bigalke
(Director de Desenvolvimento de Produto)



O original desta declaração de desempenho foi escrito em alemão. Em caso de desvios na tradução, a versão alemã é válida.

Specifications of Intended use

Concrete screw BSZ		BSZ 6			BSZ 8			BSZ 10			BSZ 12			BSZ 14		
Nominal embedment depth h _{nom} [mm]		40	55	45	55	65	55	75	85	65	85	100	75	100	115	
Anchorage subject to	Static or quasi-static loading													✓		
	Fire exposure													✓		
	Seismic action C1	✓	-	✓	✓	-	✓	-		✓	-	✓	-	✓	-	✓
	Seismic action C2, BSZ zinc plated	-	-	✓	-	-	✓	-		✓	-	✓	-	✓	-	✓
Base material	Cracked or uncracked concrete													✓		
	Reinforced or unreinforced concrete (without fibres) acc. to EN 206:2013													✓		
	Strength classes according to EN 206:2013: C20/25 to C50/60													✓		

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc plated steel, stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure including industrial and marine environment or exposure to permanently damp internal condition, if no particular aggressive conditions exist (stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure and to permanently damp internal condition, if other particular aggressive conditions exist (high corrosion resistant steel)

Note: Particular aggressive conditions are e.g. permanent, alternation immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where deicing materials are used)

Design:

- Anchorage are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.)
- Design method of anchorages according to EN 1992-4:2018 and EOTA Technical Report TR 055.

Installation:

- Making of drill hole by hammer drilling (all sizes) or vacuum drill bit (BSZ 8 – BSZ 14). When using a vacuum drill bit no drill hole cleaning is required.
- Anchor installation carried out by appropriately qualified personal and under the responsibility of the person responsible for technical matters on site.
- After installation further turning of the anchor is not possible. The head of the anchor is supported on the fixture and is not damaged.
- The borehole may be filled with the Injection Systems VME or VME plus.
- Adjustment according to Annex B5: for concrete screw BSZ 8 to BSZ 14, all anchorage depths

Concrete Screw BSZ

Table B1: Installation parameters

Anchor size			BSZ 6			BSZ 8			BSZ 10			BSZ 12			BSZ 14		
Nominal embedment depth	h_{nom} [mm]		40	55		45	55	65	55	75	85	65	85	100	75	100	115
Nominal drill bit diameter	d_0 [mm]		6			8			10			12			14		
Cutting diameter of drill bit	$d_{\text{cut}} \leq$ [mm]		6,40			8,45			10,45			12,50			14,50		
Effective anchorage depth	h_{ef} [mm]		31	44		35	43	52	43	60	68	50	67	80	58	79	92
Depth of drill hole	$h_0 \geq$ [mm]		45	60		55	65	75	65	85	95	75	95	110	85	110	125
Diameter of clearance hole in the fixture	$d_f \leq$ [mm]		8			12			14			16			18		
Max. installation torque for screws with metric connection thread	$T_{\text{inst}} \leq$ [Nm]		10			20			40			60			80		
Tangential impact screw driver ¹⁾	$T_{\text{imp,max}}$ [Nm]		160			300			400			650			650		

¹⁾ Installation with tangential impact screw driver, with maximum power output $T_{\text{imp,max}}$ acc. to manufacturer's instructions is possible

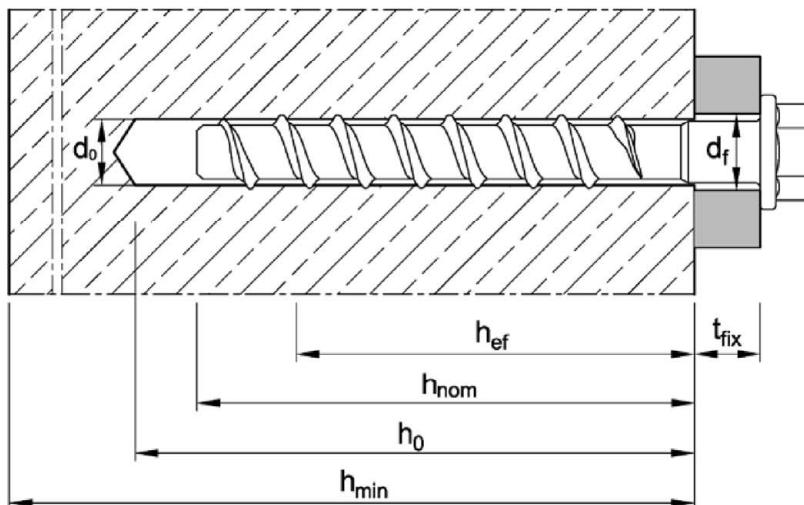


Table B2: Minimum thickness of member, minimum edge distance and minimum spacing

Anchor size			BSZ 6			BSZ 8			BSZ 10			BSZ 12			BSZ 14		
Nominal embedment depth	h_{nom} [mm]		40	55		45	55	65	55	75	85	65	85	100	75	100	115
Minimum thickness of member	h_{min} [mm]		80			80			80	90	102	80	101	120	87	119	138
Minimum spacing	s_{min} [mm]		40			40	50		50			50		70	50		70
Minimum edge distance	c_{min} [mm]		40			40	50		50			50		70	50		70

Concrete Screw BSZ


Intended use

Installation parameters / Minimum thickness of concrete member, minimum spacing and edge distance


Annex B2

Installation instructions

Drill hole preparation and cleaning

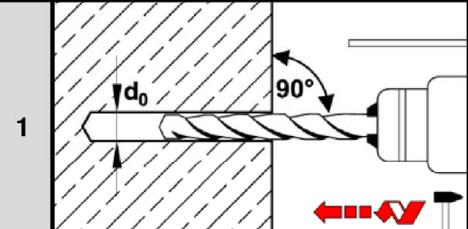


Drill hole perpendicular to concrete surface.
Using a vacuum drill, continue with step 3.

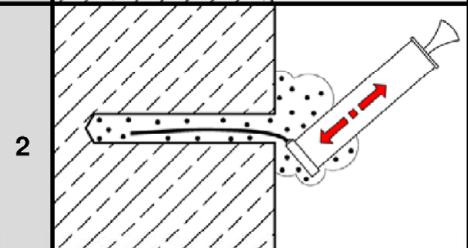


Blow out dust or alternatively vacuum clean down to the bottom of the hole.

Installation concrete screw

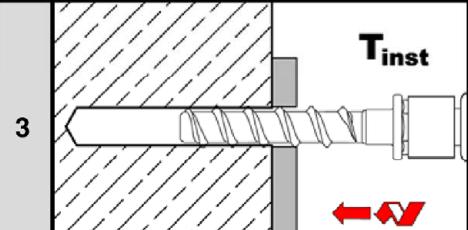

Screw in, e.g. with tangential impact screw driver or torque wrench.

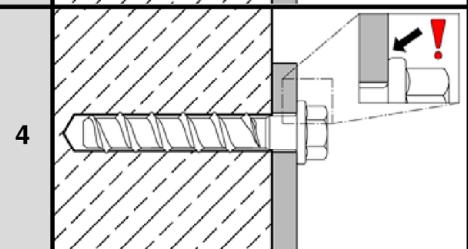


After installation, the head of the anchor is supported on the fixture and must be undamaged.


Concrete Screw BSZ

Installation instructions - filling of annular gap

Drill hole preparation and cleaning

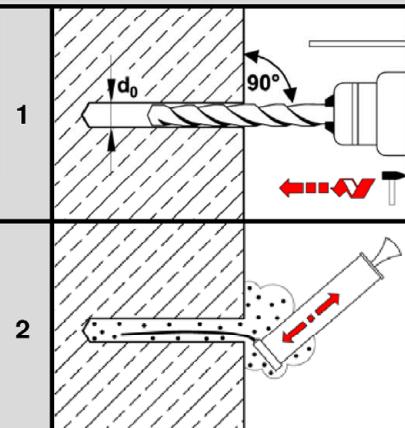


Drill hole perpendicular to concrete surface.
Using a vacuum drill, continue with step 3.

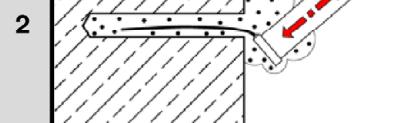


Blow out dust or alternatively vacuum clean down to the bottom of the hole.


Installation concrete screw with filling washer

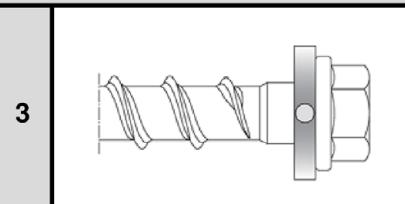

Fit the filling washer to the concrete screw.
The thickness of the filling washer must be taken into account with t_{fix} .

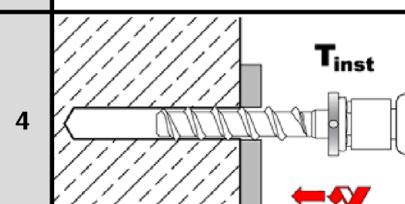


Screw in, e.g. with tangential impact screw driver or torque wrench.

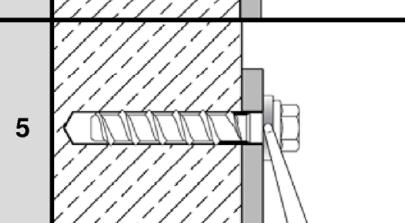


Fill the annular gap between concrete screw and fixture with mortar
(compressive strength $\geq 40 \text{ N/mm}^2$, e.g. Injection mortar VMH, VMZ or VMU plus).
Use enclosed reducing adapter. Observe information on processing of the mortar!
The annular gap is completely filled, when excess mortar seeps out.

For seismic loading, the application with and without filling of annular gap is permitted (Annex C3-C4).

Filling washer and reducing adapter for filling the annular gap between concrete screw and fixture



thickness of filling washer
 $t = 5 \text{ mm}$



Concrete Screw BSZ

Intended use




Installation instructions with filling of annular gap

Annex B4




Installation instructions - Adjustment

Step 1 - 4 according to Annex B3

1. Adjustment

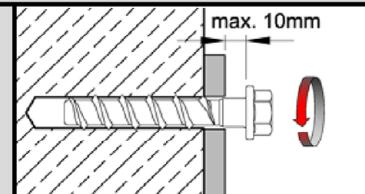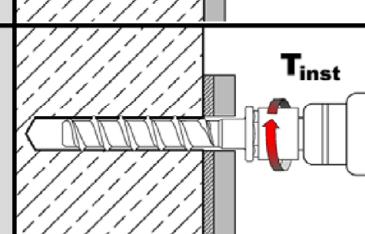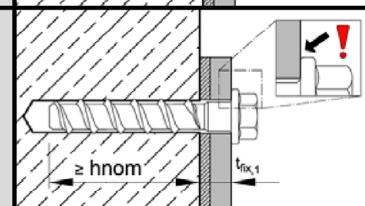 <p>5</p>	<p>Screw may be untightened maximum 10mm.</p>
 <p>6</p>	<p>After adjustment, screw in the concrete screw with tangential impact screw driver or torque wrench.</p>
 <p>7</p>	<p>After installation, the head of the anchor is supported on the fixture must be undamaged.</p>

2. Adjustment

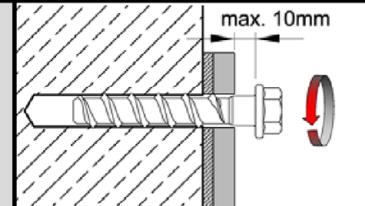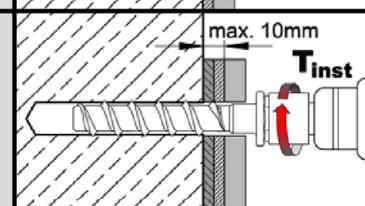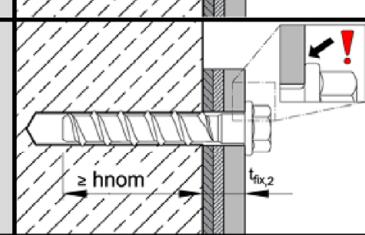 <p>8</p>	<p>Screw may be untightened maximum 10mm.</p>
 <p>9</p>	<p>After adjustment, screw in the concrete screw with tangential impact screw driver or torque wrench.</p>
 <p>10</p>	<p>After installation, the head of the anchor is supported on the fixture and must be undamaged.</p>

- adjustment is permitted for fixings with concrete screws size BSZ 8 - BSZ 14, all anchorage depths
 - the fastener may be adjusted max. 2x. The fastener must not be screwed back by more than 10mm in each case. The relining carried out during adjustment must not exceed 10 mm in total.
- Nominal embedment depth h_{nom} must still be maintained after the adjustment.

Concrete Screw BSZ

Intended use

Installation instructions - Adjustment

Annex B5

Table C1: Characteristic values for **static** or **quasi-static loads**

Anchor size		BSZ 6		BSZ 8			BSZ 10			BSZ 12			BSZ 14														
Nominal embedment depth	h_{nom} [mm]	40	55	45	55	65	55	75	85	65	85	100	75	100	115												
Installation factor	γ_{inst} [-]	1,0																									
Tension load																											
Steel failure																											
Characteristic resistance	$N_{Rk,s}$ [kN]	14		27			45			67			94														
Partial factor	$\gamma_{Ms,N}$ [-]	1,5																									
Pull-out																											
Characteristic resistance in concrete C20/25	cracked	$N_{Rk,p}$ [kN]	2,0	4,0	5,0	9,0	12	9,0	$\geq N_{Rk,c}^0$ ¹⁾	12	$\geq N_{Rk,c}^0$ ¹⁾	$\geq N_{Rk,c}^0$ ¹⁾	$\geq N_{Rk,c}^0$ ¹⁾														
	uncracked	$N_{Rk,p}$ [kN]	4,0	9,0	7,5	12	16	12	20	26	16	$\geq N_{Rk,c}^0$ ¹⁾															
Increasing factor for $N_{Rk,p}$	Ψ_c [-]	$\left(\frac{f_{ck}}{20}\right)^{0,5}$																									
Concrete cone failure																											
Effective anchorage depth	h_{ef} [mm]	31	44	35	43	52	43	60	68	50	67	80	58	79	92												
Spacing	$s_{cr,N}$ [mm]	3 h_{ef}																									
Edge distance	$c_{cr,N}$ [mm]	1,5 h_{ef}																									
Factor k_1	cracked	$k_{cr,N}$ [-]	7,7																								
	uncracked	$k_{ucr,N}$ [-]	11,0																								
Splitting																											
Characteristic resistance	$N_{Rk,sp}^0$ [kN]	$\min [N_{Rk,p}; N_{Rk,c}^0]$																									
Spacing	$s_{cr,sp}$ [mm]	120	160	120	140	150	140	180	210	150	210	240	180	240	280												
Edge distance	$c_{cr,sp}$ [mm]	60	80	60	70	75	70	90	105	75	105	120	90	120	140												
Shear load																											
Steel failure without lever arm																											
Characteristic resistance	$V_{Rk,s}^0$ [kN]	7,0		13,5			17,0	22,5	34,0	33,5	42,0	56,0															
Partial factor	$\gamma_{Ms,V}$ [-]	1,25																									
Ductility factor	k_7 [-]	0,8																									
Steel failure with lever arm																											
Characteristic bending resistance	$M_{Rk,s}^0$ [Nm]	10,9		26			56			113			185														
Concrete pry-out failure																											
Pry-out factor	k_8 [-]	1,0		1,0			1,0			2,0			1,0														
Concrete edge failure																											
Effective length of anchor	$l_f = h_{\text{ef}}$ [mm]	31	44	35	43	52	43	60	68	50	67	80	58	79	92												
Outside diameter of anchor	d_{nom} [mm]	6		8			10			12			14														

¹⁾ $N_{Rk,c}^0$ according to EN 1992-4:2018

Concrete Screw BSZ

Performance
Characteristic values for **static** or **quasi-static loads**

Annex C1

Table C2: Characteristic resistance for **seismic loading**, performance category **C1**

Anchor size		BSZ 6		BSZ 8		BSZ 10		BSZ 12		BSZ 14	
Nominal embedment depth	h_{nom} [mm]	40	55	65	55	85	100	115			
Installation factor	γ_{inst} [-]						1,0				
Tension load											
Steel failure											
Characteristic resistance	$N_{Rk,s,eq}$ [kN]	14		27		45		67		94	
Partial factor	γ_{Ms} [-]					1,5					
Pull-out											
Characteristic resistance	$N_{Rk,p,eq}$ [kN]	2,0	4,0	12	9,0			$\geq N_{Rk,c}^0$ ¹⁾			
Concrete cone failure											
Effective anchorage depth	h_{ef} [mm]	31	44	52	43	68	80	92			
Spacing	$s_{cr,N}$ [mm]					3 h_{ef}					
Edge distance	$c_{cr,N}$ [mm]					1,5 h_{ef}					
Shear load											
Steel failure without lever arm											
Characteristic resistance	$V_{Rk,s,eq}$ [kN]	4,7	5,5	8,5	13,5	15,3	21,0	22,4			
Partial factor	γ_{Ms} [-]					1,25					
Concrete pry-out failure											
Pry-out factor	k_8 [-]			1,0				2,0			
Concrete edge failure											
Effective length of anchor	$l_f = h_{\text{ef}}$ [mm]	31	44	52	43	68	80	92			
Outside diameter of anchor	d_{nom} [mm]	6		8	10		12	14			
Factor for annular gap	<u>with</u> filling of annular gap	α_{gap} [-]				1,0					
	<u>without</u> filling of annular gap	α_{gap} [-]				0,5					

¹⁾ $N_{Rk,c}^0$ for concrete strength class C20/25, according to EN 1992-4:2018

Concrete Screw BSZ

Performance

Characteristic resistance for **seismic loading**, performance category **C1**

Annex C2

Table C3: Characteristic resistance for **seismic loading**, performance category **C2**,
with filling of annular gap, concrete screw BSZ zinc plated

Anchor size		BSZ 8	BSZ 10	BSZ 12	BSZ 14
Nominal embedment depth	h_{nom} [mm]	65	85	100	115
Installation factor	γ_{inst} [-]			1,0	
Tension load					
Steel failure					
Characteristic resistance	$N_{Rk,s,\text{eq}}$ [kN]	27	45	67	94
Partial factor	γ_{Ms} [-]			1,5	
Pull-out					
Characteristic resistance	$N_{Rk,p,\text{eq}}$ [kN]	2,4	5,4	7,1	10,5
Concrete cone failure					
Effective anchorage depth	h_{ef} [mm]	52	68	80	92
Spacing	$s_{cr,N}$ [mm]			3 h_{ef}	
Edge distance	$c_{cr,N}$ [mm]			1,5 h_{ef}	
Shear load					
Steel failure without lever arm					
Characteristic resistance	$V_{Rk,s,\text{eq}}$ [kN]	9,9	18,5	31,6	40,7
Partial factor	γ_{Ms} [-]			1,25	
Concrete pry-out failure					
Pry-out factor	k_8 [-]	1,0		2,0	
Concrete edge failure					
Effective length of anchor	$l_f = h_{\text{ef}}$ [mm]	52	68	80	92
Outside diameter of anchor	d_{nom} [mm]	8	10	12	14
Factor for annular gap <u>with</u> filling of annular gap	α_{gap} [-]			1,0	

Concrete Screw BSZ

Performance

Characteristic resistance for **seismic loading**, performance category **C2**
with filling of annular gap

Annex C3

Table C4: Characteristic resistance for **seismic loading**, performance category **C2, without filling of annular gap**, concrete screw BSZ zinc plated

Anchor size			BSZ 8	BSZ 10	BSZ 12	BSZ 14
Nominal embedment depth	h_{nom}	[mm]	65	85	100	115
Installation factor	γ_{inst}	[-]		1,0		
Tension loads						
Hexagon head	Steel failure					
	Characteristic resistance	$N_{Rk,s,\text{eq}}$	[kN]	27	45	67
	Partial factor	γ_{Ms}	[-]		1,5	
Countersunk head	Pull-out					
	Characteristic resistance	$N_{Rk,p,\text{eq}}$	[kN]	2,4	5,4	7,1
	Characteristic resistance	$N_{Rk,p,\text{eq}}$	[kN]	2,4	5,4	no performance assessed
Concrete cone failure	Steel failure					
	Characteristic resistance	$N_{Rk,s,\text{eq}}$	[kN]	27	45	
	Partial factor	γ_{Ms}	[-]	1,5		
Shear loads	Pull-out					
	Characteristic resistance	$N_{Rk,p,\text{eq}}$	[kN]	2,4	5,4	no performance assessed
	Steel failure without lever arm					
Hexagon head	Characteristic resistance	$V_{Rk,s,\text{eq}}$	[kN]	10,3	21,9	24,4
	Partial factor	γ_{Ms}	[-]		1,25	
Counter-sunk head	Characteristic resistance	$V_{Rk,s,\text{eq}}$	[kN]	3,6	13,7	no performance assessed
	Partial factor	γ_{Ms}	[-]	1,25		
Concrete pry-out failure						
Pry-out factor	k_8	[-]	1,0		2,0	
Concrete edge failure						
Effective length of anchor	$l_f = h_{\text{ef}}$	[mm]	52	68	80	92
Outside diameter of anchor	d_{nom}	[mm]	8	10	12	14
Factor for annular gap without filling of annular gap	α_{gap}	[-]		0,5		
Concrete Screw BSZ						
Performance Characteristic resistance for seismic loading , performance category C2 without filling of annular gap						Annex C4

Table C5: Characteristic values of resistance under **fire exposure**

Anchor size		BSZ 6		BSZ 8			BSZ 10			BSZ 12			BSZ 14															
Nominal anchorage depth	h_{nom} [mm]	40	55	45	55	65	55	75	85	65	85	100	75	100	115													
Steel failure (tension and shear resistance)																												
Characteristic resistance	R30	$N_{Rk,s,fi}$ = $V_{Rk,s,fi}$ [kN]	0,9	2,4	4,4	7,3	10,3																					
	R60		0,8	1,7	3,3	5,8	8,2																					
	R90		0,6	1,1	2,3	4,2	5,9																					
	R120		0,4	0,7	1,7	3,4	4,8																					
Steel failure with lever arm																												
Characteristic bending resistance	R30	$M_{Rk,s,fi}^0$ [Nm]	0,7	2,4	5,9	12,3	20,4																					
	R60		0,6	1,8	4,5	9,7	15,9																					
	R90		0,5	1,2	3,0	7,0	11,6																					
	R120		0,3	0,9	2,3	5,7	9,4																					
Edge distance	$c_{cr,fi}$ [mm]	2 h_{ef}																										
In case of fire attack from more than one side, the minimum edge distance shall be ≥ 300 mm																												
Spacing	$s_{cr,fi}$ [mm]	4 h_{ef}																										
The characteristic resistance for pull-out $N_{Rk,p,fi}$, concrete cone failure $N_{Rk,c,fi}^0$, concrete pry-out $V_{Rk,cp,fi}$ and concrete edge failure $V_{Rk,c,fi}^0$ shall be calculated according to EN 1992-4:2018.																												
The anchorage depth has to be increased for wet concrete by at least 30 mm compared to the given values																												

Concrete Screw BSZ

Performance
Characteristic values of resistance under **fire exposure**

Annex C5

Table C6: Displacements under static or quasi-static loads

Anchor size		BSZ 6		BSZ 8			BSZ 10			BSZ 12			BSZ 14			
Nominal embedment depth	h_{nom} [mm]	40	55	45	55	65	55	75	85	65	85	100	75	100	115	
Tension load																
cracked concrete	Tension load N	[kN]	0,95	1,9	2,4	4,3	5,7	4,3	7,9	9,6	5,7	9,4	12,3	7,6	12,0	15,1
	δ_{N0}	[mm]	0,3	0,6	0,6	0,7	0,8	0,6	0,5	0,9	0,9	0,5	1,0	0,5	0,8	0,7
	Displacement															
uncracked concrete	Tension load N	[kN]	1,9	4,3	3,6	5,7	7,6	5,7	9,5	11,9	7,6	13,2	17,2	10,6	16,9	21,2
	δ_{N0}	[mm]	0,4	0,6	0,7	0,9	0,5	0,7	1,1	1,0	1,0	1,1	1,2	0,9	1,2	0,8
	Displacement															
Shear load																
Shear load V	[kN]	3,3		8,6			16,2			20,0			30,5			
	δ_{v0}	[mm]	1,55		2,7			2,7			4,0			3,1		
	Displacement															
$\delta_{v\infty}$	[mm]	3,1		4,1			4,3			6,0			4,7			

Concrete Screw BSZ

Performance

Displacements under static or quasi-static loads

Annex C6

Table C7: Displacements under **seismic loading**, performance category **C2**
with filling of annular gap, concrete screw BSZ zinc plated

Anchor size		BSZ 8	BSZ 10	BSZ 12	BSZ 14
Nominal embedment depth	h_{nom} [mm]	65	85	100	115
Tension load					
Displacement DLS	$\delta_{N,\text{eq(DLS)}}$ [mm]	0,66	0,32	0,57	1,16
Displacement ULS	$\delta_{N,\text{eq(ULS)}}$ [mm]	1,74	1,36	2,36	4,39
Shear load					
Displacement DLS	$\delta_{V,\text{eq(DLS)}}$ [mm]	1,68	2,91	1,88	2,42
Displacement ULS	$\delta_{V,\text{eq(ULS)}}$ [mm]	5,19	6,72	5,37	9,27

Table C8: Displacements under **seismic loading**, performance category **C2**
without filling of annular gap, concrete screw BSZ zinc plated

Anchor size		BSZ 8	BSZ 10	BSZ 12	BSZ 14
Nominal embedment depth	h_{nom} [mm]	65	85	100	115
Tension load					
Type with hexagon head					
Displacement DLS	$\delta_{N,\text{eq(DLS)}}$ [mm]	0,66	0,32	0,57	1,16
Displacement ULS	$\delta_{N,\text{eq(ULS)}}$ [mm]	1,74	1,36	2,36	4,39
Type with countersunk head					
Displacement DLS	$\delta_{N,\text{eq(DLS)}}$ [mm]	0,66	0,32	-	-
Displacement ULS	$\delta_{N,\text{eq(ULS)}}$ [mm]	1,74	1,36	-	-
Shear load					
Type with hexagon head					
Displacement DLS	$\delta_{V,\text{eq(DLS)}}$ [mm]	4,21	4,71	4,42	5,60
Displacement ULS	$\delta_{V,\text{eq(ULS)}}$ [mm]	7,13	8,83	6,95	12,63
Type with countersunk head					
Displacement DLS	$\delta_{V,\text{eq(DLS)}}$ [mm]	2,51	2,98	-	-
Displacement ULS	$\delta_{V,\text{eq(ULS)}}$ [mm]	7,76	6,25	-	-

Concrete Screw BSZ

Performance

Displacements under **seismic loading**, performance category **C2**

Annex C7