

**DECLARAȚIA DE PERFORMANȚĂ**DoP Nr.: **MKT-1.1-900\_ro**

- ◇ **Cod unic de identificare al produsului-tip:** **Bolțuri ancore BZ3 / BZ3 A4 / BZ3 HCR**
- ◇ **Utilizare (utilizări) preconizată (preconizate):** Ancora mecanică pentru ancorare în beton, a se vedea anexa / Annex B
- ◇ **Fabricant:** MKT Metall-Kunststoff-Technik GmbH & Co.KG  
Auf dem Immel 2  
67685 Weilerbach
- ◇ **Sistem sau sisteme de evaluare și verificare a constanței performanței:** 1
- ◇ **Documentul de evaluare european:** **EAD 330232-01-0601**  
Evaluarea tehnică europeană: **ETA-19/0619, 26.02.2020**  
Organismul de evaluare tehnică: **DIBt, Berlin**  
Organism (organisme) notificat(e): **NB 2873 – Technische Universität Darmstadt**

◇ **Performanța (performanțe) declarată (declarate):**

Caracteristici esențiale	Performanță
<b>Rezistență mecanică și stabilitate (BWR 1)</b>	
Distanțele minime de margine și centru	Anexa / Annex B3
Rezistențe caracteristice sub sarcină la tracțiune (efecte statice și cvasistatice)	Anexa / Annex C1, C2
Rezistențe caracteristice sub stres transversal (efecte statice și cvasistatice)	Anexa / Annex C3
Rezistențe caracteristice pentru categoriile de performanță seismică C1 + C2	Anexa / Annex C4
Schimbări	Anexa / Annex C6, C7
Durabilitate	Anexa / Annex B1
<b>Securitatea la incendiu (BWR 2)</b>	
Comportamentul la foc	Clasa A1
Rezistență la foc	Anexa / Annex C5

Performanța produsului de mai sus este performanța / performanța declarată. Producătorul de mai sus este singurul responsabil de întocmirea declarației de performanță în conformitate cu Regulamentul (EU) nr. 305/2011.

Semnata pentru și în numele fabricantului de către:

  
**Stefan Weustenhagen**

(Director general)  
**Weilerbach, 01.01.2021**

p.p.   
**Dipl.-Ing. Detlef Bigalke**

(Sef de dezvoltare a produselor)



Originalul acestei declarații de performanță a fost scris în limba germană. În cazul abaterilor în traducere, versiunea germană este validă.

## Specifications of intended use

Wedge Anchor	BZ3 / BZ3 A4 / BZ3 HCR			
	M8	M10	M12	M16
Static or quasi-static action	✓			
Seismic performance categories C1 and C2	✓			
Fire exposure	R30 / R60 / R90 / R120			
Variable, effective anchorage depth	35 mm to 90 mm	40 mm to 100 mm	50 mm to 125 mm	65 mm to 160 mm

### Base materials:

- Cracked or uncracked concrete
- Reinforced or unreinforced normal weight concrete according to EN 206: 2013 + A1:2016
- Strength classes C20/25 to C50/60 according to EN 206: 2013 + A1:2016

### Use conditions (Environmental conditions):

- Structures subject to dry internal conditions: **BZ3, BZ3 A4, BZ3 HCR**
- For all other conditions according to EN 1993-1-4:2015-10 corresponding to corrosion resistance classes:
  - according to Annex A, Table A.3: CRC I - III **BZ3 A4, BZ3 HCR**
  - according to Annex A, Table A.3: CRC IV, V **BZ3 HCR**

### Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the fastener is indicated on the design drawings (e.g. position of the fastener relative to reinforcement or to supports, etc.)
- Design method EN 1992-4:2018 and Technical Report TR 055

### Installation:

- Hole drilling by hammer drill bit or vacuum drill bit
- Use of the fastener only as supplied by the manufacturer without exchanging the components of the fastener (exception: when using the cap nut HM)
- Optionally, the annular gap between fixture and stud of the BZ3 can be filled to reduce the hole clearance. For this purpose, the filling washer (annex A3) must be used in addition to the supplied washer. For filling use high-strength mortar with compressive strength  $\geq 40\text{N/mm}^2$ .

Wedge Anchor BZ3 / BZ3 A4 / BZ3 HCR

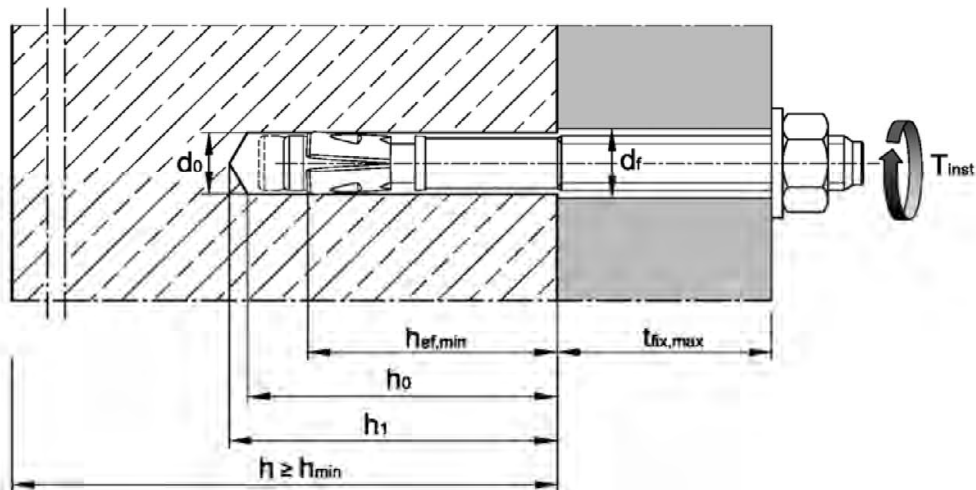
Intended use  
Specifications

Annex B1

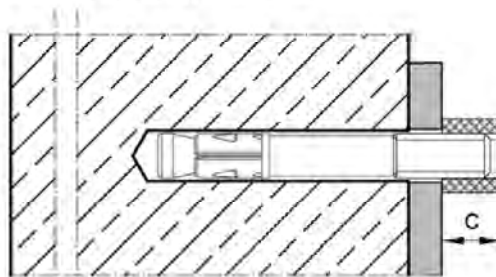
**Table B1: Installation parameters**

Anchor size			BZ3 / BZ3 A4 / BZ3 HCR				
			M8	M10	M12	M16	
Nominal drill hole diameter	$d_0$	[mm]	8	10	12	16	
Cutting diameter of drill bit	$d_{cut} \leq$	[mm]	8,45	10,45	12,5	16,5	
Minimum effective anchorage depth	$h_{ef,min}$	[mm]	35	40	50	65	
Maximum effective anchorage depth	$h_{ef,max}$	[mm]	90	100	125	160	
Depth of drill hole	$h_0 \geq$	[mm]	$h_{ef} + 8$	$h_{ef} + 9$	$h_{ef} + 10$	$h_{ef} + 14$	
	$h_1 \geq$	[mm]	$h_{ef} + 10$	$h_{ef} + 11$	$h_{ef} + 13$	$h_{ef} + 17$	
Diameter of clearance hole in the fixture <sup>1)</sup>	$d_f \leq$	[mm]	9	12	14	18	
Projection after anchor has been inserted for installing with cap nut HM (according to Annex B5)	C	[mm]	10,5	12,5	16,0	19,5	
Installation torque	BZ3	$T_{inst}$	[Nm]	15	40	60	110
	BZ3 A4 / HCR	$T_{inst}$	[Nm]	15	40	55	100

<sup>1)</sup> For larger diameters of clearance hole in the fixture, see EN 1992-4, chapter 6.2.2.2



**Setting gauge for installation with cap nut HM**



C [mm] :  
Projection after anchor has been inserted for installing with cap nut HM or height of setting gauge (see Table B1 and Annex B6).

**Wedge Anchor BZ3 / BZ3 A4 / BZ3 HCR**

**Intended use**  
Installation parameters

**Annex B2**

**Table B2: Minimum thickness of concrete member, minimum spacings, edge distances and required area**

Anchor size				BZ3 / BZ3 A4 / BZ3 HCR				
				M8	M10	M12	M16	
Minimum member thickness depending on $h_{ef}$	$h_{min} \geq$	[mm]	max (1,5 · $h_{ef}$ ; 80)		max (1,5 · $h_{ef}$ ; 100)		max (1,5 · $h_{ef}$ ; 120)	
<b>Minimum edge distances and spacings</b>								
Minimum edge distance	$c_{min}$	[mm]	40	45	55	65		
Minimum spacings	$s_{min}$	[mm]	35	40	50	65		
<b>Projected required area <math>A_{pr,req}</math></b>								
Projected required area	BZ3	cracked concrete	$A_{pr,req}$	[mm <sup>2</sup> ]	13 900	23 700	31 500	42 300
		uncracked concrete	$A_{pr,req}$	[mm <sup>2</sup> ]	22 500	34 700	41 300	50 200
	BZ3 A4, BZ3 HCR	cracked concrete	$A_{pr,req}$	[mm <sup>2</sup> ]	16 900	25 900	29 800	44 300
		uncracked concrete	$A_{pr,req}$	[mm <sup>2</sup> ]	19 700	35 700	35 300	54 800
<p>The edge distances and spacings shall be selected in steps of 5 mm. In combination with variable anchorage depths and member thicknesses, the following equation must be fulfilled:</p>								
$A_{pr,req} \leq A_{pr,ef}$				$A_{pr,req}$ Projected required area $A_{pr,ef}$ Projected effective area (acc. to Table B4)				

**Table B3: Applicable concrete thickness  $h_{sp}$  and area  $A_{sp}$  to determine characteristic edge distance  $c_{cr,sp}$**

Anchor size				M8	M10	M12	M16
Applicable concrete thickness	BZ3 BZ3 A4, BZ3 HCR	$h_{sp}$	[kN]	$\min(h ; h_{ef} + 1,5 \cdot c \cdot \sqrt{2})$			
Area to determine $c_{cr,sp}$ <sup>1)</sup>	BZ3	$A_{sp}$	[mm <sup>2</sup> ]	$\frac{N_{Rk,sp}^0 - 2,573}{0,000436}$	$\frac{N_{Rk,sp}^0 + 2,040}{0,000693}$	$\frac{N_{Rk,sp}^0 + 3,685}{0,000692}$	$\frac{N_{Rk,sp}^0 + 3,738}{0,000875}$
	BZ3 A4, BZ3 HCR	$A_{sp}$	[mm <sup>2</sup> ]	$\frac{N_{Rk,sp}^0 + 4,177}{0,000862}$	$\frac{N_{Rk,sp}^0 + 7,235}{0,000967}$	$\frac{N_{Rk,sp}^0 + 7,847}{0,000951}$	$\frac{N_{Rk,sp}^0 + 11,415}{0,000742}$

<sup>1)</sup> with  $N_{Rk,sp}^0$  in kN

**Wedge Anchor BZ3 / BZ3 A4 / BZ3 HCR**

**Intended use**  
 Minimum spacings and edge distances  
 Required area and applicable concrete thickness

**Annex B3**

**Table B4: Projected effective area  $A_{pr,ef}$  to determine spacings and edge distances**

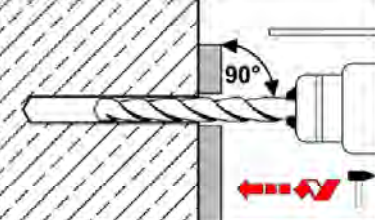

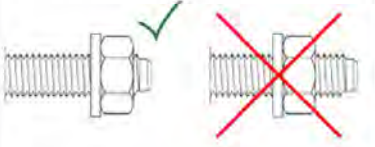
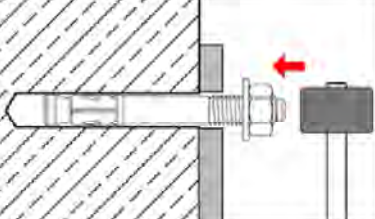
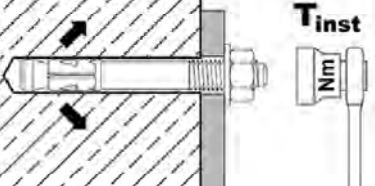
Member thickness: $h > h_{ef} + 1,5 \cdot c$			
Effective anchorage depth $h_{ef} < 1,5 \cdot c$		Effective anchorage depth $h_{ef} \geq 1,5 \cdot c$	
anchor group with $s \geq 3 \cdot c$ or single anchor			
$A_{pr,ef} = 2 \cdot (3 \cdot c) \cdot (1,5 \cdot c + h_{ef})$ [mm <sup>2</sup> ]		$A_{pr,ef} = 2 \cdot (3 \cdot c) \cdot (3 \cdot c)$ [mm <sup>2</sup> ]	
Anchor group ( $s < 3 \cdot c$ )			
$A_{pr,ef} = (3 \cdot c + s) \cdot (1,5 \cdot c + h_{ef})$ [mm <sup>2</sup> ]		$A_{pr,ef} = (3 \cdot c + s) \cdot (3 \cdot c)$ [mm <sup>2</sup> ]	
Member thickness: $h \leq h_{ef} + 1,5 \cdot c$			
Effective anchorage depth $h_{ef} \leq 1,5 \cdot c$		Effective anchorage depth $h_{ef} > 1,5 \cdot c$	
anchor group with $s \geq 3 \cdot c$ or single anchor			
$A_{pr,ef} = 2 \cdot (3 \cdot c) \cdot h$ [mm <sup>2</sup> ]		$A_{pr,ef} = 2 \cdot (3 \cdot c) \cdot (h - h_{ef} + 1,5 \cdot c)$ [mm <sup>2</sup> ]	
Anchor group ( $s < 3 \cdot c$ )			
$A_{pr,ef} = (3 \cdot c + s) \cdot h$ [mm <sup>2</sup> ]		$A_{pr,ef} = (3 \cdot c + s) \cdot (h - h_{ef} + 1,5 \cdot c)$ [mm <sup>2</sup> ]	
<p>If the area <math>A_{pr,ef}</math> is trimmed by lateral edges (<math>c_2 &lt; 1,5 \cdot c</math>), calculate the area actually present. The spacings and edge distances shall be rounded to 5 mm.</p>			

**Wedge Anchor BZ3 / BZ3 A4 / BZ3 HCR**

**Intended use**  
Projected effective area to determine spacings and edge distances

**Annex B4**

# Installation instructions

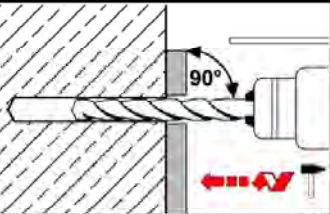

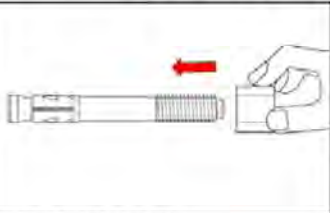
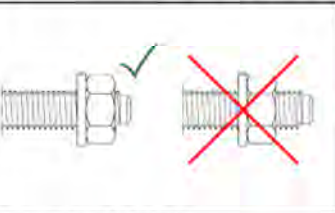
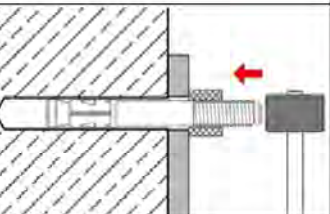
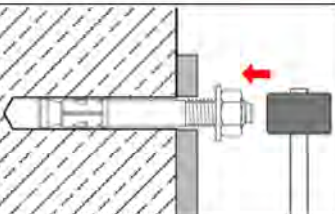
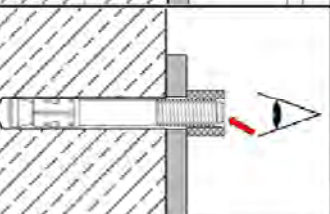
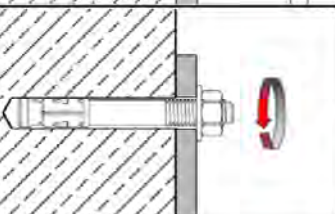
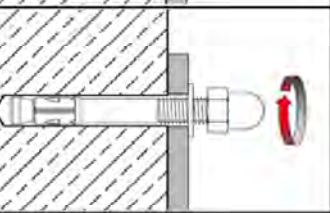
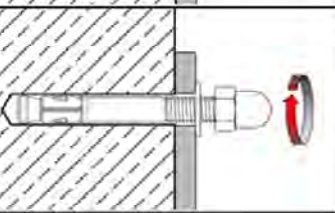
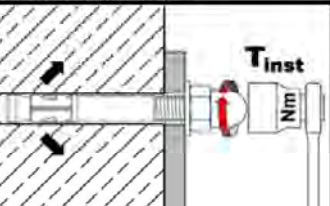
1		<p>Drill hole perpendicular to concrete surface. If using a vacuum drill bit, proceed with step 3.</p>
2		<p>Blow out dust. Alternatively vacuum clean down to the bottom of the hole.</p>
3		<p>Check position of nut and washer.</p>
4		<p>Drive in fastener.</p>
5		<p>Apply installation torque <math>T_{inst}</math>.</p>

Wedge Anchor BZ3 / BZ3 A4 / BZ3 HCR

Intended use  
Installation instructions

Annex B5

## Installation with cap nut HM

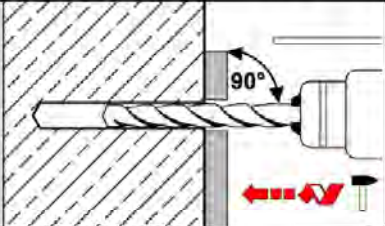

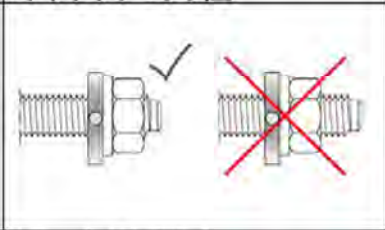
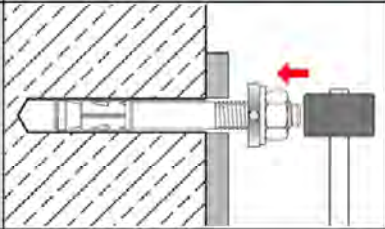
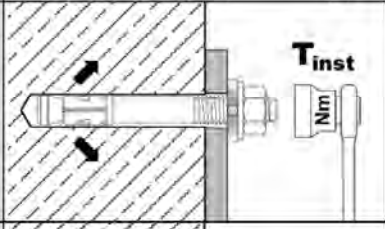
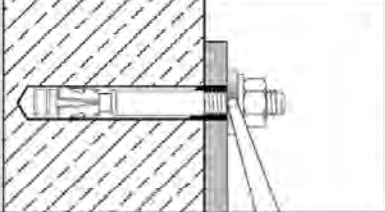
1		<p>Drill hole perpendicular to concrete surface. If using a vacuum drill bit, proceed with step 3.</p>	
2		<p>Blow out dust. Alternatively vacuum clean down to the bottom of the hole.</p>	
<p style="text-align: center;"><b>Installation <u>with</u> setting gauge</b></p>		<p style="text-align: center;"><b>Installation <u>without</u> setting gauge</b></p>	
3		<p>Remove nut and washer. Attach setting gauge.</p>	 <p>Check position of nut.</p>
4		<p>Drive in fastener until end of the anchor is level with setting gauge.</p>	 <p>Drive in fastener</p>
5		<p>Check excess length of the anchor, remove setting gauge.</p>	 <p>Remove nut.</p>
6		<p>Screw on washer and cap nut.</p>	 <p>Screw on cap nut</p>
7		<p>Apply installation torque <math>T_{inst}</math>.</p>	

**Wedge Anchor BZ3 / BZ3 A4 / BZ3 HCR**

**Intended use**  
Installation instructions with cap nut

**Annex B6**

## Installation instructions with filling of annular gap

1		<p>Drill hole perpendicular to concrete surface. If using a vacuum drill bit, proceed with step 3.</p>
2		<p>Blow out dust. Alternatively vacuum clean down to the bottom of the hole.</p>
3		<p>Fit the filling washer additionally to the fastener. Check position of nut and washer.</p>
4		<p>Drive in fastener.</p>
5		<p>Apply installation torque <math>T_{inst}</math>.</p>
6		<p>Fill the annular gap between anchor and fixture with mortar (compressive strength <math>\geq 40 \text{ N/mm}^2</math>). Use enclosed reducing adapter. Observe the processing information of the mortar! The annular gap is completely filled, when excess mortar seeps out.</p>

**Wedge Anchor BZ3 / BZ3 A4 / BZ3 HCR**

**Intended use**  
Installation instructions with filling of annular gap

**Annex B7**



**Table C1: Characteristic values for tension loads under static and quasi-static action, BZ3 zinc plated**

Fastener size			BZ3 (zρ)			
			M8	M10	M12	M16
Installation factor	$\gamma_{inst}$	[-]	1,0			
<b>Steel failure</b>						
Characteristic resistance	$N_{Rk,s}$	[kN]	19,8	30,4	44,9	79,3
Modulus of elasticity	$E_s$	[N/mm <sup>2</sup> ]	210.000			
Partial factor	$\gamma_{Ms}$	[-]	1,5			
<b>Pull-out</b>						
Characteristic resistance in cracked concrete C20/25	$N_{Rk,p,cr}$	[kN]	9,5	15	22	30
Increasing factor for $N_{Rk,p,cr}$	$\psi_C$	[-]	$\left(\frac{f_{ck}}{20}\right)^{0,439}$	$\left(\frac{f_{ck}}{20}\right)^{0,265}$	$\left(\frac{f_{ck}}{20}\right)^{0,5}$	$\left(\frac{f_{ck}}{20}\right)^{0,339}$
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,p,ucr}$	[kN]	14	24	30	50
Increasing factor for $N_{Rk,p,ucr}$	$\psi_C$	[-]	$\left(\frac{f_{ck}}{20}\right)^{0,489}$	$\left(\frac{f_{ck}}{20}\right)^{0,448}$	$\left(\frac{f_{ck}}{20}\right)^{0,5}$	$\left(\frac{f_{ck}}{20}\right)^{0,203}$
<b>Splitting</b>						
Characteristic resistance	$N_{Rk,sp}^0$	[kN]	$\min(N_{Rk,p}; N_{Rk,c}^0)$			
Characteristic edge distance <sup>2)</sup>	$c_{cr,sp}$	[mm]	$\frac{A_{sp} + 0,8 \cdot (h_{sp} - h_{ef})^2}{(3,41 \cdot h_{sp} - 0,59 \cdot h_{ef})}$			
Characteristic spacing	$s_{cr,sp}$	[mm]	$2 \cdot c_{cr,sp}$			
<b>Concrete cone failure</b>						
Minimum, effective anchorage depth	$h_{ef,min}$	[mm]	35 <sup>1)</sup>	40	50	65
Maximum, effective anchorage depth	$h_{ef,max}$	[mm]	90	100	125	160
Characteristic edge distance	$c_{cr,N}$	[mm]	$1,5 \cdot h_{ef}$			
Characteristic spacing	$s_{cr,N}$	[mm]	$2 \cdot c_{cr,N}$			
Factor $k_1$	cracked concrete	$k_{cr,N}$	7,7			
	uncracked concrete	$k_{ucr,N}$	11,0			

<sup>1)</sup> Fastenings with anchorage depth  $h_{ef} < 40$ mm are restricted to the use of structural components which are statically indeterminate and subject to internal exposure conditions only.

<sup>2)</sup> Applicable concrete thickness  $h_{sp}$  and area  $A_{sp}$  to determine characteristic edge distance  $c_{cr,sp}$  according to Table B3

<sup>3)</sup>  $N_{Rk,c}^0$  according to EN 1992-4:2018

**Wedge Anchor BZ3 / BZ3 A4 / BZ3 HCR**

**Performance**  
Characteristic values for tension loads

**Annex C1**

**Table C2: Characteristic values for tension loads under static or quasi-static action, BZ3 A4 and BZ3 HCR**

Fastener size			BZ3 A4 and BZ3 HCR			
			M8	M10	M12	M16
Installation factor	$\gamma_{inst}$	[-]	1,0			
<b>Steel failure</b>						
Characteristic resistance	$N_{Rk,s}$	[kN]	19,8	30,4	44,9	74,6
Modulus of elasticity - BZ3 A4	$E_s$	[N/mm <sup>2</sup> ]	200.000			
Modulus of elasticity - BZ3 HCR	$E_s$	[N/mm <sup>2</sup> ]	195.000			
Partial factor	$\gamma_{Ms}$	[-]	1,5			
<b>Pull-out</b>						
Characteristic resistance in cracked concrete C20/25	$N_{Rk,p,cr}$	[kN]	9,5	17	22	35
Increasing factor for $N_{Rk,p,cr}$	$\psi_C$	[-]	$\left(\frac{f_{ck}}{20}\right)^{0,488}$	$\left(\frac{f_{ck}}{20}\right)^{0,5}$	$\left(\frac{f_{ck}}{20}\right)^{0,435}$	$\left(\frac{f_{ck}}{20}\right)^{0,350}$
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,p,ucr}$	[kN]	20	25	42	50
Increasing factor for $N_{Rk,p,ucr}$	$\psi_C$	[-]	$\left(\frac{f_{ck}}{20}\right)^{0,240}$	$\left(\frac{f_{ck}}{20}\right)^{0,364}$	$\left(\frac{f_{ck}}{20}\right)^{0,213}$	$\left(\frac{f_{ck}}{20}\right)^{0,196}$
<b>Splitting</b>						
Characteristic resistance	$N^0_{Rk,sp}$	[kN]	$\min ( N_{Rk,p} ; N^0_{Rk,c}{}^3 )$			
Characteristic edge distance <sup>2)</sup>	$c_{cr,sp}$	[mm]	$\frac{A_{sp} + 0,8 \cdot (h_{sp} - h_{ef})^2}{(3,41 \cdot h_{sp} - 0,59 \cdot h_{ef})}$			
Characteristic spacing	$s_{cr,sp}$	[mm]	$2 \cdot c_{cr,sp}$			
<b>Concrete cone failure</b>						
Minimum, effective anchorage depth	$h_{ef,min}$	[mm]	35 <sup>1)</sup>	40	50	65
Maximum, effective anchorage depth	$h_{ef,max}$	[mm]	90	100	125	160
Characteristic edge distance	$c_{cr,N}$	[mm]	$1,5 \cdot h_{ef}$			
Characteristic spacing	$s_{cr,N}$	[mm]	$2 \cdot c_{cr,N}$			
Factor $k_1$	cracked concrete	$k_{cr,N}$	7,7			
	uncracked concrete	$k_{ucr,N}$	11,0			

<sup>1)</sup> Fastenings with anchorage depth  $h_{ef} < 40$  mm are restricted to the use of structural components which are statically indeterminate and subject to internal exposure conditions only

<sup>2)</sup> Applicable concrete thickness  $h_{sp}$  and area  $A_{sp}$  according to Table B3 to determine characteristic edge distance  $c_{cr,sp}$

<sup>3)</sup>  $N^0_{Rk,c}$  according to EN 1992-4:2018

**Wedge Anchor BZ3 / BZ3 A4 / BZ3 HCR**

**Performance**  
Characteristic values for tension loads

**Annex C2**

**Table C3:** Characteristic values for **shear loads** under static and quasi-static action

Fastener size				BZ3 / BZ3 A4 / BZ3 HCR			
				M8	M10	M12	M16
Installation factor	$\gamma_{inst}$	[-]	1,0				
<b>Steel failure <u>without</u> lever arm</b>							
Characteristic resistance	BZ3	$V_{Rk,s}^0$ [kN]	15,7	26,8	38,3	60,0	
	BZ3 A4 / HCR	$V_{Rk,s}^0$ [kN]	16,8	27,8	39,8	69,5	
Partial factor	$\gamma_{Ms}$	[-]	1,25				
Ductility factor	$k_7$	[-]	1,0				
<b>Steel failure <u>with</u> lever arm</b>							
Characteristic bending resistance	BZ3	$M_{Rk,s}^0$ [Nm]	30	60	105	240	
	BZ3 A4 / HCR	$M_{Rk,s}^0$ [Nm]	27	55	99	223	
Partial factor	$\gamma_{Ms}$	[-]	1,25				
<b>Concrete pry-out failure</b>							
Pry-out factor	BZ3	$k_8$	[-]	2,8	3,1	3,0	3,6
	BZ3 A4 / HCR	$k_8$	[-]	2,7	2,8	3,3	3,4
<b>Concrete edge failure</b>							
Effective length of fastener in shear loading	$l_f$	[mm]	$h_{ef}$ <sup>1)</sup>				
Outside diameter of fastener	$d_{nom}$	[mm]	8	10	12	16	

<sup>1)</sup> Fastenings with anchorage depth  $h_{ef} < 40$  mm are restricted to the use of structural components which are statically indeterminate and subject to internal exposure conditions only.

**Wedge Anchor BZ3 / BZ3 A4 / BZ3 HCR**

**Performance**  
Characteristic values for **shear loads**

**Annex C3**

**Table C4: Characteristic values for seismic loading, performance category C1**

Fastener size				BZ3 / BZ3 A4 / BZ3 HCR							
				M8		M10		M12		M16	
Effective anchorage depth	$h_{ef} \geq$	[mm]		40	45	40	60	50	70	65	85
<b>Tension load</b>											
Installation factor	$\gamma_{inst}$	[-]		1,0							
<b>Steel failure</b>											
Characteristic resistance	BZ3	$N_{Rk,s,C1}$	[kN]	19,8		30,4		44,9		79,3	
	BZ3 A4 / HCR	$N_{Rk,s,C1}$	[kN]	19,8		30,4		44,9		74,6	
<b>Pull-out</b>											
Characteristic resistance	BZ3	$N_{Rk,s,C1}$	[kN]	9,1		15,0		22,0		30,0	
	BZ3 A4 / HCR	$N_{Rk,s,C1}$	[kN]	9,0		17,0		22,0		35,0	
<b>Shear load</b>											
<b>Steel failure without lever arm</b>											
Characteristic resistance	BZ3	$V_{Rk,s,C1}$	[kN]	11,7	13,4	22,5	24,4	30,0	33,8	48,8	52,3
	BZ3 A4 / HCR	$V_{Rk,s,C1}$	[kN]	11,0	12,7	20,6	22,2	33,2	33,2	61,1	64,3
Factor for anchorages	with annular gap	$\alpha_{gap}$	[-]	0,5							
	without annular gap	$\alpha_{gap}$	[-]	1,0							

**Table C5: Characteristic values for seismic loading, performance category C2**

Fastener size				BZ3 / BZ3 A4 / BZ3 HCR							
				M8		M10		M12		M16	
Effective anchorage depth	$h_{ef} \geq$	[mm]		40	45	40	60	50	70	65	85
<b>Tension load</b>											
Installation factor	$\gamma_{inst}$	[-]		1,0							
<b>Steel failure</b>											
Characteristic resistance	BZ3	$N_{Rk,s,C2}$	[kN]	19,8		30,4		44,9		79,3	
	BZ3 A4 / HCR	$N_{Rk,s,C2}$	[kN]	19,8		30,4		44,9		74,6	
<b>Pull-out</b>											
Characteristic resistance	BZ3	$N_{Rk,s,C2}$	[kN]	2,8	3,6	7,3	12,5	10,7	19,0	19,8	35,2
	BZ3 A4 / HCR	$N_{Rk,s,C2}$	[kN]	2,3	3,2	5,0	7,7	8,0	13,8	19,0	29,4
<b>Shear load</b>											
<b>Steel failure without lever arm</b>											
Characteristic resistance	BZ3	$V_{Rk,s,C2}$	[kN]	7,3	11,3	15,4	19,0	18,3	28,0	39,4	43,3
	BZ3 A4 / HCR	$V_{Rk,s,C2}$	[kN]	7,5	8,6	12,5	15,9	22,4	25,6	42,7	46,1
Factor for anchorages	with annular gap	$\alpha_{gap}$	[-]	0,5							
	without annular gap	$\alpha_{gap}$	[-]	1,0							

**Wedge Anchor BZ3 / BZ3 A4 / BZ3 HCR**

**Performance**  
Characteristic resistance for seismic loading

**Annex C4**

**Table C6: Characteristic values for tension and shear load under fire exposure**

Fastener size		BZ3 / BZ3 A4 / BZ3 HCR					
		M8	M10	M12	M16		
<b>Tension load</b>							
<b>Steel failure</b>							
Characteristic resistance	R30	$N_{Rk,s,fi}$	[kN]	1,2	2,6	4,6	7,7
	R60			1,0	1,9	3,3	5,6
	R90			0,7	1,3	2,1	3,5
	R120			0,6	1,0	1,5	2,5
<b>Shear load</b>							
<b>Steel failure <u>without</u> lever arm</b>							
Characteristic resistance	R30	$V_{Rk,s,fi}$	[kN]	4,0	7,5	12,3	20,7
	R60			2,7	5,1	8,5	14,2
	R90			1,4	2,7	4,6	7,7
	R120			0,8	1,6	2,7	4,5
<b>Steel failure <u>with</u> lever arm</b>							
Characteristic resistance	R30	$M^0_{Rk,s,fi}$	[Nm]	4,1	9,6	19,1	43,8
	R60			2,8	6,6	13,1	30,1
	R90			1,5	3,5	7,2	16,4
	R120			0,8	2,0	4,2	9,6

$N_{Rk,p,fi}$  according to EN 1992-4:2018

**Wedge Anchor BZ3 / BZ3 A4 / BZ3 HCR**

**Performance**  
Characteristic values under fire exposure

**Annex C5**

**Table C7: Displacements under tension load, BZ3 zinc plated**

Fastener size			BZ3 (zp)							
			M8		M10		M12		M16	
Displacements under static or quasi-static action										
			$\delta_{N0} = \delta_{N0\text{-factor}} \cdot N$ N: acting tension load $\delta_{N\infty} = \delta_{N\infty\text{-factor}} \cdot N$							
Effective anchorage depth	$h_{ef} \geq$	[mm]	35	40	50	65				
Cracked concrete										
Factor for displacement	$\delta_{N0\text{-factor}}$	[mm/kN]	0,13	0,05	0,04	0,03				
	$\delta_{N\infty\text{-factor}}$	[mm/kN]	0,29	0,20	0,15	0,11				
Uncracked concrete										
Factor for displacement	$\delta_{N0\text{-factor}}$	[mm/kN]	0,03	0,01	0,004	0,005				
	$\delta_{N\infty\text{-factor}}$	[mm/kN]	0,03	0,03	0,03	0,03				
Displacement under seismic action <b>C2</b>										
Effective anchorage depth	$h_{ef} \geq$	[mm]	40	45	40	60	50	70	65	85
Displacements for DLS	$\delta_{N, C2(DLS)}$	[mm]	3,9	4,9	2,8	4,7	2,4	4,2	2,5	4,5
Displacements for ULS	$\delta_{N, C2(ULS)}$	[mm]	11,3	14,3	9,4	16,1	7,3	12,9	7,2	12,8

**Table C8: Displacements under tension load, BZ3 A4 and BZ3 HCR**

Fastener size			BZ3 A4 / BZ3 HCR							
			M8		M10		M12		M16	
Displacements under static or quasi-static action										
			$\delta_{N0} = \delta_{N0\text{-factor}} \cdot N$ N: acting tension load $\delta_{N\infty} = \delta_{N\infty\text{-factor}} \cdot N$							
Effective anchorage depth	$h_{ef} \geq$	[mm]	35	40	50	65				
Cracked concrete										
Factor for displacement	$\delta_{N0\text{-factor}}$	[mm/kN]	0,11	0,06	0,05	0,02				
	$\delta_{N\infty\text{-factor}}$	[mm/kN]	0,27	0,17	0,16	0,08				
Uncracked concrete										
Factor for displacement	$\delta_{N0\text{-factor}}$	[mm/kN]	0,02	0,00	0,001	0,00				
	$\delta_{N\infty\text{-factor}}$	[mm/kN]	0,05	0,05	0,05	0,05				
Displacement under seismic action <b>C2</b>										
Effective anchorage depth	$h_{ef} \geq$	[mm]	40	45	40	60	50	70	65	85
Displacements for DLS	$\delta_{N, C2(DLS)}$	[mm]	2,0	2,9	2,6	4,1	3,3	5,7	3,3	5,1
Displacements for ULS	$\delta_{N, C2(ULS)}$	[mm]	7,7	11,1	10,8	16,8	10,4	18,0	9,0	13,9

**Wedge Anchor BZ3 / BZ3 A4 / BZ3 HCR**

**Performance**  
Displacements under tension load

**Annex C6**

**Table C9: Displacements under shear load, BZ3 zinc plated**

Fastener size			BZ3 (zp)							
			M8	M10	M12	M16				
Displacements under static or quasi-static action										
$\delta_{V0} = \delta_{V0-factor} \cdot V$			V: acting shear load							
$\delta_{V\infty} = \delta_{V\infty-factor} \cdot V$										
Effective anchorage depth	$h_{ef} \geq$	[mm]	35	40	50	65				
Factor for displacement	$\delta_{V0-factor}$	[mm/kN]	0,15	0,09	0,09	0,07				
	$\delta_{V\infty-factor}$	[mm/kN]	0,22	0,13	0,14	0,11				
Displacement under seismic action <b>C2</b> <sup>1)</sup>										
Effective anchorage depth	$h_{ef} \geq$	[mm]	40	45	40	60	50	70	65	85
Displacements for DLS	$\delta_{V,C2(DLS)}$	[mm]	2,8	2,7	3,0	3,1	3,4	3,7	3,4	3,8
Displacements for ULS	$\delta_{V,C2(ULS)}$	[mm]	5,1	5,0	5,0	5,5	6,3	9,9	6,0	9,6

<sup>1)</sup> For anchorages with clearance in the fixture the annular gap must also be taken into account

**Table C10: Displacements under shear load, BZ3 A4 and BZ3 HCR**

Fastener size			BZ3 A4 / BZ3 HCR							
			M8	M10	M12	M16				
Displacements under static or quasi-static action										
$\delta_{V0} = \delta_{V0-factor} \cdot V$			V: acting shear load							
$\delta_{V\infty} = \delta_{V\infty-factor} \cdot V$										
Effective anchorage depth	$h_{ef} \geq$	[mm]	35	40	50	65				
Factor for displacement	$\delta_{V0-factor}$	[mm/kN]	0,26	0,14	0,12	0,09				
	$\delta_{V\infty-factor}$	[mm/kN]	0,39	0,20	0,17	0,14				
Displacement under seismic action <b>C2</b> <sup>1)</sup>										
Effective anchorage depth	$h_{ef} \geq$	[mm]	40	45	40	60	50	70	65	85
Displacements for DLS	$\delta_{V,C2(DLS)}$	[mm]	2,8	3,0	3,4	3,5	3,5	4,2	3,8	4,4
Displacements for ULS	$\delta_{V,C2(ULS)}$	[mm]	5,2	5,1	7,0	8,4	7,5	11,8	7,8	11,1

<sup>1)</sup> For anchorages with clearance in the fixture the annular gap must also be taken into account

**Wedge Anchor BZ3 / BZ3 A4 / BZ3 HCR**

**Performance**  
Displacements under shear load

**Annex C7**