



...eine starke Verbindung

## PRESTATIEVERKLARING

DoP Nr.: MKT-212 - nl

- ✧ **Unieke identificatiecode van het producttype:** **Boutanker B**
- ✧ **Beoogd(e) gebruik(en):** Mechanisch anker voor verankering in beton, zie bijlage / Annex B
- ✧ **Fabrikant:** MKT Metall-Kunststoff-Technik GmbH & Co.KG  
Auf dem Immel 2  
67685 Weilerbach
- ✧ **Het systeem of de systemen voor de Beoordeling en verificatie van de prestatiebestendigheid:** 1
- ✧ **Europees beoordelingsdocument:** **EAD 330232-00-0601**  
Europese technische beoordeling: **ETA-01/0013, 29.11.2018**  
Technische beoordelingsinstantie: DIBt, Berlin  
Aangemelde instantie(s): NB 1343 – MPA, Darmstadt
- ✧ **Aangegeven prestatie(s):**

| Essentiële kenmerken  | Prestaties   |
|---|--|
| <b>Mechanische weerstand en stabiliteit (BWR1)</b>  |  |
| Karakteristieke weerstand onder trekspanning (statische en quasi-statische effecten)        | Bijlage/Annex C1 – C2                                  |
| Karakteristieke weerstand onder zijwaartse spanning (statische en quasi-statische effecten) | Bijlage/Annex C3                                       |
| Verschuivingen (statische en quasi-statische effecten)                                      | Bijlage/Annex C4                                       |
| Karakteristieke weerstand en verplaatsingen voor seismische prestatie categorie C1 + C2     | NPD (No Performance Determined) geen prestatie bepaald |
| <b>Brandveiligheid (BWR2)</b>   |  |
| Brandgedrag   | Klasse A1  |
| Brandwerendheid   | NPD (No Performance Determined) geen prestatie bepaald |

De prestaties van het hierboven omschreven product zijn conform de aangegeven prestaties. Deze prestatieverklaring wordt in overeenstemming met Verordening (EU) nr. 305/2011 onder de exclusieve verantwoordelijkheid van de hierboven vermelde fabrikant verstrekt.

Ondertekend voor en namens de fabrikant door:

  
**Stefan Weustenhagen**  
(Directeur)  
Weilerbach, 29.11.2018

p.p.   
**Dipl.-Ing. Detlef Bigalke**  
(Hoofd productontwikkeling)



Het origineel van deze prestatieverklaring was in het Duits geschreven. In geval van afwijkingen in de vertaling is de Duitse versie geldig.

## Specifications of intended use

| Wedge Anchor B                |                                |                    | M6 | M8 | M10 | M12 | M16 | M20 |
|-------------------------------|--------------------------------|--------------------|----|----|-----|-----|-----|-----|
| Materials                     | Steel zinc plated              | electroplated      | ✓  | ✓  | ✓   | ✓   | ✓   | ✓   |
|                               |                                | hot-dip galvanized | -  | ✓  | ✓   | ✓   | ✓   | ✓   |
|                               |                                | sherardized        | ✓  | ✓  | ✓   | ✓   | ✓   | ✓   |
|                               | Stainless steel                | A4                 | ✓  | ✓  | ✓   | ✓   | ✓   | ✓   |
|                               | High corrosion resistant steel | HCR                | ✓  | ✓  | ✓   | ✓   | ✓   | ✓   |
| Static or quasi-static action |                                |                    |    |    |     |     |     | ✓   |
| Reduced anchorage depth       |                                |                    |    |    |     |     |     | ✓   |
| Uncracked concrete            |                                |                    |    |    |     |     |     | ✓   |

### Base materials:

- Compacted, reinforced or unreinforced normal weight concrete (without fibers) acc. to EN 206:2013
- Strength classes C20/25 to C50/60 according to EN 206:2013

### Use conditions (Environmental conditions):

|  |   |
|--|---|
| Structures subject to dry internal conditions  | zinc plated steel,<br>stainless steel A4,<br>high corrosion resistant steel HCR |
| Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist | stainless steel A4,<br>high corrosion resistant steel HCR                       |
| Structures subject to external atmospheric exposure and to permanently damp internal condition, if other particular aggressive conditions exist <sup>1)</sup>                              | high corrosion resistant steel HCR  |

<sup>1)</sup> Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

### Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages are designed according to EN 1992-4:2018 or TR 055

### Installation:

- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- In case of aborted hole: new drilling at a minimum distance away of twice the depth of the aborted hole or smaller distance if the aborted drill hole is filled with high strength mortar and if under shear or oblique tension load it is not in the direction of load application.
- Anchor installation such that the effective anchorage depth is complied with. This compliance is ensured, if the thickness of fixture is not greater than the maximum thickness of fixture marked on the anchor in accordance with Annex A1 and A2 and the hexagon nut is placed at the end of the conical bolt as delivered by the manufacturer.


## Wedge Anchor B

Intended use  
Specifications

**Annex B1**

**Table B1: Installation parameters, steel zinc plated**
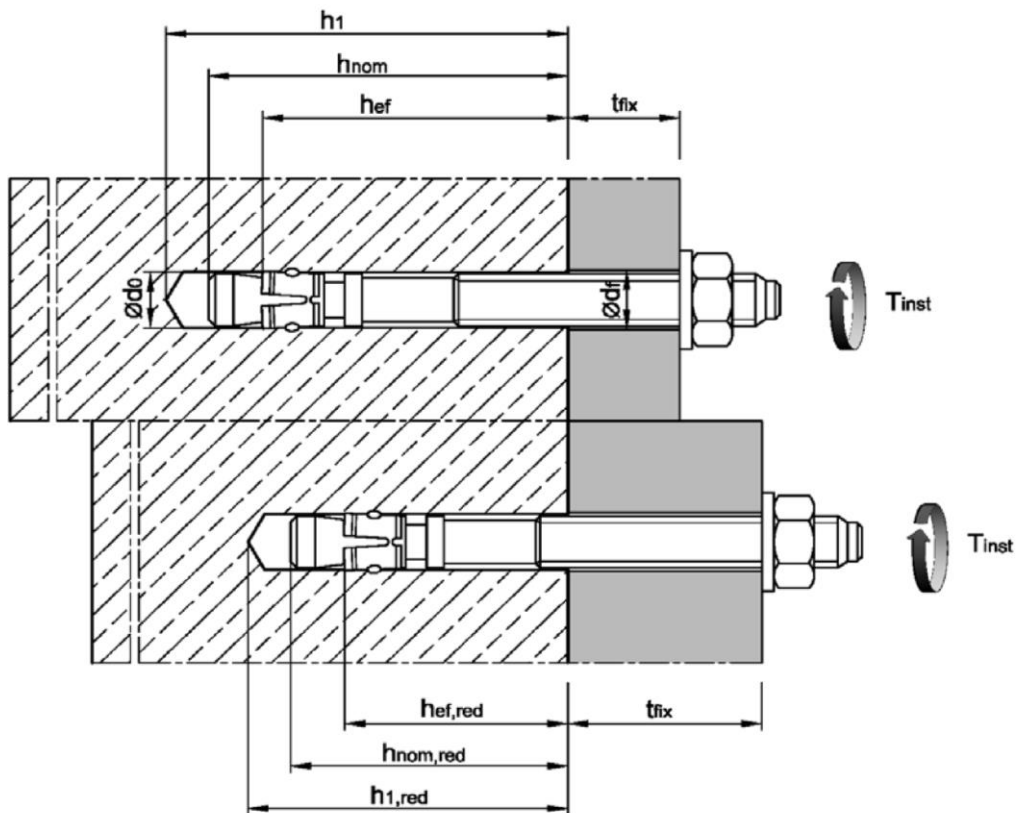
| Anchor size                               |                         | M6   | M8   | M10   | M12  | M16  | M20   |
|---|-------------------------|------|------|-------|------|------|-------|
| Nominal drill hole diameter               | $d_0 =$ [mm]            | 6    | 8    | 10    | 12   | 16   | 20    |
| Cutting diameter of drill bit             | $d_{cut} \leq$ [mm]     | 6,40 | 8,45 | 10,45 | 12,5 | 16,5 | 20,55 |
| Installation torque (electroplated)       | $T_{inst} =$ [Nm]       | 8    | 15   | 30    | 50   | 100  | 200   |
| Installation torque (hot-dip galvanized)  | $T_{inst} =$ [Nm]       | -    | 15   | 30    | 40   | 90   | 120   |
| Installation torque (sherardized)         | $T_{inst} =$ [Nm]       | 5    | 15   | 30    | 40   | 90   | 120   |
| Diameter of clearance hole in the fixture | $d_f \leq$ [mm]         | 7    | 9    | 12    | 14   | 18   | 22    |
| <b>Standard anchorage depth</b>           |                         |      |      |       |      |      |       |
| Depth of drill hole                       | $h_1 \geq$ [mm]         | 55   | 65   | 70    | 90   | 110  | 130   |
| Embedment depth                           | $h_{nom} \geq$ [mm]     | 49   | 56   | 62    | 82   | 102  | 121   |
| Effective anchorage depth                 | $h_{ef} \geq$ [mm]      | 40   | 44   | 48    | 65   | 82   | 100   |
| <b>Reduced anchorage depth</b>            |                         |      |      |       |      |      |       |
| Depth of drill hole                       | $h_{1,red} \geq$ [mm]   | 45   | 55   | 65    | 75   | 95   | 110   |
| Embedment depth                           | $h_{nom,red} \geq$ [mm] | 39   | 47   | 56    | 67   | 84   | 99    |
| Effective anchorage depth                 | $h_{ef,red} \geq$ [mm]  | 30   | 35   | 42    | 50   | 64   | 78    |




**Wedge Anchor B**

Intended use  
Installation data, steel zinc plated

**Annex B2**

**Table B2: Installation parameters, stainless steel A4 / HCR**
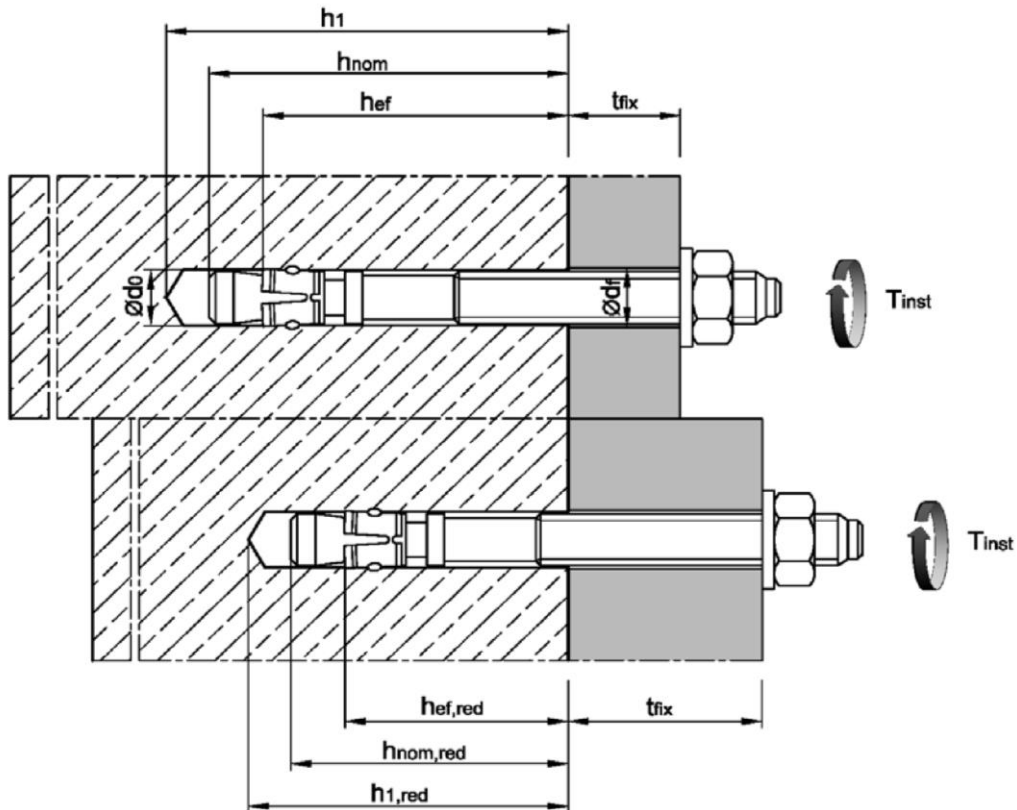
| Anchor size                               |                         | M6   | M8   | M10   | M12  | M16  | M20   |
|---|-------------------------|------|------|-------|------|------|-------|
| Nominal drill hole diameter               | $d_0 =$ [mm]            | 6    | 8    | 10    | 12   | 16   | 20    |
| Cutting diameter of drill bit             | $d_{cut} \leq$ [mm]     | 6,40 | 8,45 | 10,45 | 12,5 | 16,5 | 20,55 |
| Installation torque                       | $T_{inst} =$ [Nm]       | 6    | 15   | 25    | 50   | 100  | 160   |
| Diameter of clearance hole in the fixture | $d_f \leq$ [mm]         | 7    | 9    | 12    | 14   | 18   | 22    |
| <b>Standard anchorage depth</b>           |                         |      |      |       |      |      |       |
| Depth of drill hole                       | $h_1 \geq$ [mm]         | 55   | 65   | 70    | 90   | 110  | 130   |
| Embedment depth                           | $h_{nom} \geq$ [mm]     | 49   | 56   | 62    | 81   | 99   | 121   |
| Effective anchorage depth                 | $h_{ef} \geq$ [mm]      | 40   | 44   | 48    | 65   | 80   | 100   |
| <b>Reduced anchorage depth</b>            |                         |      |      |       |      |      |       |
| Depth of drill hole                       | $h_{1,red} \geq$ [mm]   | 45   | 55   | 65    | 75   | 95   | 110   |
| Embedment depth                           | $h_{nom,red} \geq$ [mm] | 39   | 47   | 56    | 66   | 83   | 99    |
| Effective anchorage depth                 | $h_{ef,red} \geq$ [mm]  | 30   | 35   | 42    | 50   | 64   | 78    |



**Wedge Anchor B**

Intended use  
Installation data, stainless steel A4/HCR

**Annex B3**

**Table B3: Minimum spacings and edge distances, steel zinc plated**

| Anchor size  |           |      | M6  | M8  | M10 | M12 | M16 | M20 |
|--|-----------|------|-----|-----|-----|-----|-----|-----|
| <b>Standard anchorage depth <math>h_{ef}</math></b>    |           |      |     |     |     |     |     |     |
| Minimum member thickness                               | $h_{min}$ | [mm] | 100 | 100 | 100 | 130 | 170 | 200 |
| Minimum spacing  | $s_{min}$ | [mm] | 35  | 40  | 55  | 75  | 90  | 105 |
| Minimum edge distance                                  | $c_{min}$ | [mm] | 40  | 45  | 65  | 90  | 105 | 125 |
| <b>Reduced anchorage depth <math>h_{ef,red}</math></b> |           |      |     |     |     |     |     |     |
| Minimum member thickness                               | $h_{min}$ | [mm] | 80  | 80  | 100 | 100 | 130 | 160 |
| Minimum spacing  | $s_{min}$ | [mm] | 35  | 40  | 55  | 100 | 100 | 140 |
| Minimum edge distance                                  | $c_{min}$ | [mm] | 40  | 45  | 65  | 100 | 100 | 140 |

**Table B4: Minimum spacings and edge distances, stainless steel A4 / HCR**

| Anchor size  |              |      | M6  | M8  | M10 | M12 | M16 | M20 |
|--|--------------|------|-----|-----|-----|-----|-----|-----|
| <b>Standard anchorage depth <math>h_{ef}</math></b>    |              |      |     |     |     |     |     |     |
| Minimum member thickness                               | $h_{min}$    | [mm] | 100 | 100 | 100 | 130 | 160 | 200 |
| Minimum spacing  | $s_{min}$    | [mm] | 35  | 35  | 45  | 60  | 80  | 100 |
|  | for $c \geq$ | [mm] | 40  | 65  | 70  | 100 | 120 | 150 |
| Minimum edge distance                                  | $c_{min}$    | [mm] | 35  | 45  | 55  | 70  | 80  | 100 |
|  | for $s \geq$ | [mm] | 60  | 110 | 80  | 100 | 140 | 180 |
| <b>Reduced anchorage depth <math>h_{ef,red}</math></b> |              |      |     |     |     |     |     |     |
| Minimum member thickness                               | $h_{min}$    | [mm] | 80  | 80  | 100 | 100 | 130 | 160 |
| Minimum spacing  | $s_{min}$    | [mm] | 35  | 60  | 55  | 100 | 110 | 140 |
| Minimum edge distance                                  | $c_{min}$    | [mm] | 40  | 60  | 65  | 100 | 110 | 140 |

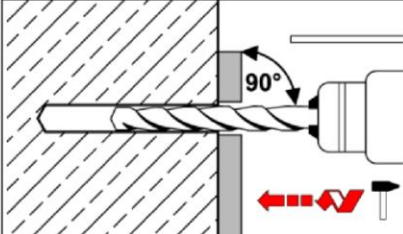
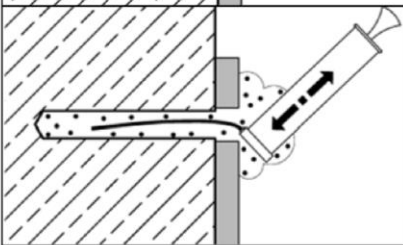
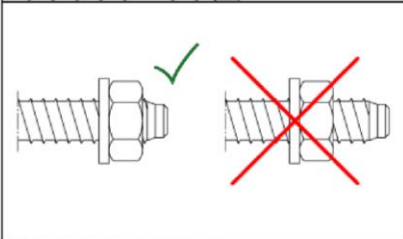
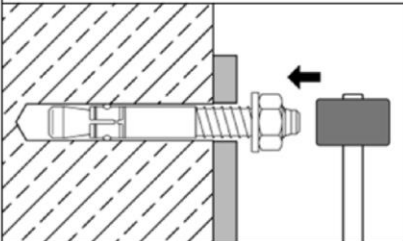
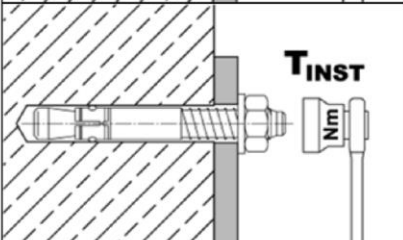
Intermediate values by linear interpolation.

**Wedge Anchor B**

**Intended use**  
Minimum spacings and edge distances

**Annex B4**

## Installation instructions

|   |   |
|---|---|
|    | <p>Drill hole perpendicular to concrete surface, positioning of the drill holes without damaging the reinforcement.</p>   |
|    | <p>Blow out dust.</p>   |
|    | <p>Check position of nut.</p>   |
|   | <p>Drive in anchor, such that <math>h_{ef}</math> or <math>h_{ef,red}</math> is met. This is ensured, if the thickness of fixture is not greater than the maximum thickness of fixture marked on the anchor in accordance with Annex A2 and A3.</p> |
|  | <p>Apply installation torque <math>T_{inst}</math> as specified in Table B2.</p>  |

### Wedge Anchor B

Intended use  
Installation instructions

Annex B5

**Table C1: Characteristic values for tension loads, steel zinc plated**

| Anchor size  |                        | M6                                     | M8               | M10 | M12 | M16 | M20 |
|--|------------------------|--|------------------|-----|-----|-----|-----|
| Installation factor                                    | $\gamma_{inst}$ [-]    | 1,0                                    |                  |     |     |     |     |
| <b>Steel failure</b>                                   |                        |  |                  |     |     |     |     |
| Characteristic resistance                              | $N_{Rk,s}$ [kN]        | 8,7                                    | 15,3             | 26  | 35  | 65  | 107 |
| Partial factor   | $\gamma_{Ms}$ [-]      | 1,5                                    |                  |     |     | 1,6 |     |
| <b>Pull-out</b>  |                        |  |                  |     |     |     |     |
| <b>Standard anchorage depth <math>h_{ef}</math></b>    |                        |  |                  |     |     |     |     |
| Characteristic resistance in uncracked concrete C20/25 | $N_{Rk,p}$ [kN]        | 9                                      | 12               | 16  | 1)  | 1)  | 1)  |
| <b>Reduced anchorage depth <math>h_{ef,red}</math></b> |                        |  |                  |     |     |     |     |
| Characteristic resistance in uncracked concrete C20/25 | $N_{Rk,p}$ [kN]        | 6 <sup>2)</sup>                        | 1) <sup>2)</sup> | 1)  | 1)  | 1)  | 1)  |
| Increasing factor for $N_{Rk,p}$                       | $\psi_C$ [-]           | $\left(\frac{f_{ck}}{20}\right)^{0,5}$ |                  |     |     |     |     |
| <b>Splitting</b>                                       |                        |  |                  |     |     |     |     |
| Characteristic resistance in uncracked concrete C20/25 | $N^0_{Rk,sp}$ [kN]     | min [ $N_{Rk,p}$ ; $N^0_{Rk,c}$ ]      |                  |     |     |     |     |
| <b>Standard anchorage depth <math>h_{ef}</math></b>    |                        |  |                  |     |     |     |     |
| Spacing  | $s_{cr,sp}$ [mm]       | 160                                    | 220              | 240 | 330 | 410 | 500 |
| Edge distance  | $c_{cr,sp}$ [mm]       | 80                                     | 110              | 120 | 165 | 205 | 250 |
| <b>Reduced anchorage depth <math>h_{ef,red}</math></b> |                        |  |                  |     |     |     |     |
| Spacing  | $s_{cr,sp}$ [mm]       | 180                                    | 210              | 230 | 240 | 320 | 400 |
| Edge distance  | $c_{cr,sp}$ [mm]       | 90                                     | 105              | 115 | 120 | 160 | 200 |
| <b>Concrete cone failure</b>                           |                        |  |                  |     |     |     |     |
| <b>Standard anchorage depth <math>h_{ef}</math></b>    |                        |  |                  |     |     |     |     |
| Effective anchorage depth                              | $h_{ef} \geq$ [mm]     | 40                                     | 44               | 48  | 65  | 82  | 100 |
| Spacing  | $s_{cr,N}$ [mm]        | 3 $h_{ef}$                             |                  |     |     |     |     |
| Edge distance  | $c_{cr,N}$ [mm]        | 1,5 $h_{ef}$                           |                  |     |     |     |     |
| <b>Reduced anchorage depth <math>h_{ef,red}</math></b> |                        |  |                  |     |     |     |     |
| Effective anchorage depth                              | $h_{ef,red} \geq$ [mm] | 30 <sup>2)</sup>                       | 35 <sup>2)</sup> | 42  | 50  | 64  | 78  |
| Spacing  | $s_{cr,N}$ [mm]        | 3 $h_{ef,red}$                         |                  |     |     |     |     |
| Edge distance  | $c_{cr,N}$ [mm]        | 1,5 $h_{ef,red}$                       |                  |     |     |     |     |
| Factor for $k_1$                                       | $k_{ucr,N}$ [-]        | 11,0                                   |                  |     |     |     |     |

<sup>1)</sup> Pullout failure is not decisive

<sup>2)</sup> Use restricted to anchorages of indeterminate structural components

**Wedge Anchor B**

**Performance**  
Characteristic values for tension loads, steel zinc plated

**Annex C1**

**Table C2: Characteristic values for tension loads, stainless steel A4 / HCR**

| Anchor size  |                 |      | M6                                     | M8               | M10 | M12 | M16 | M20 |      |
|--|-----------------|------|--|------------------|-----|-----|-----|-----|------|
| Installation factor  | $\gamma_{inst}$ | [-]  | 1,0                                    |                  |     |     |     |     |      |
| <b>Steel failure</b>   |                 |      |  |                  |     |     |     |     |      |
| Characteristic resistance  | $N_{Rk,s}$      | [kN] | 10                                     | 18               | 30  | 44  | 88  | 134 |      |
| Partial factor   | $\gamma_{Ms}$   | [-]  | 1,50                                   |                  |     |     |     |     | 1,68 |
| <b>Pull-out</b>  |                 |      |  |                  |     |     |     |     |      |
| <b>Standard anchorage depth <math>h_{ef}</math></b>                            |                 |      |  |                  |     |     |     |     |      |
| Characteristic resistance in uncracked concrete C20/25                         | $N_{Rk,p}$      | [kN] | 7,5                                    | 12               | 16  | 25  | 1)  | 1)  |      |
| <b>Reduced anchorage depth <math>h_{ef,red}</math></b>                         |                 |      |  |                  |     |     |     |     |      |
| Characteristic resistance in uncracked concrete C20/25                         | $N_{Rk,p}$      | [kN] | 6 <sup>2)</sup>                        | 9 <sup>2)</sup>  | 12  | 1)  | 1)  | 1)  |      |
| <b>Splitting</b>   |                 |      |  |                  |     |     |     |     |      |
| <b>Standard anchorage depth <math>h_{ef}</math></b>                            |                 |      |  |                  |     |     |     |     |      |
| The higher one of the decisive resistances of Case 1 and Case 2 is applicable. |                 |      |  |                  |     |     |     |     |      |
| Case 1   |                 |      |  |                  |     |     |     |     |      |
| Characteristic resistance in uncracked concrete C20/25                         | $N^0_{Rk,sp}$   | [kN] | 6                                      | 9                | 12  | 20  | 30  | 40  |      |
| Spacing  | $S_{cr,sp}$     | [mm] | 3 $h_{ef}$                             |                  |     |     |     |     |      |
| Edge distance  | $C_{cr,sp}$     | [mm] | 1,5 $h_{ef}$                           |                  |     |     |     |     |      |
| Case 2   |                 |      |  |                  |     |     |     |     |      |
| Characteristic resistance in uncracked concrete C20/25                         | $N^0_{Rk,sp}$   | [kN] | 7,5                                    | 12               | 16  | 25  | 1)  | 1)  |      |
| Spacing  | $S_{cr,sp}$     | [mm] | 160                                    | 220              | 240 | 340 | 410 | 560 |      |
| Edge distance  | $C_{cr,sp}$     | [mm] | 80                                     | 110              | 120 | 170 | 205 | 280 |      |
| <b>Reduced anchorage depth <math>h_{ef,red}</math></b>                         |                 |      |  |                  |     |     |     |     |      |
| Characteristic resistance in uncracked concrete C20/25                         | $N^0_{Rk,sp}$   | [kN] | 6 <sup>2)</sup>                        | 9 <sup>2)</sup>  | 12  | 1)  | 1)  | 1)  |      |
| Spacing  | $S_{cr,sp}$     | [mm] | 180                                    | 210              | 230 | 300 | 320 | 400 |      |
| Edge distance  | $C_{cr,sp}$     | [mm] | 90                                     | 105              | 115 | 150 | 160 | 200 |      |
| Increasing factor for $N_{Rk,p}$ and $N^0_{Rk,sp}$                             | $\psi/C$        | [-]  | $\left(\frac{f_{ck}}{20}\right)^{0,5}$ |                  |     |     |     |     |      |
| <b>Concrete cone failure</b>   |                 |      |  |                  |     |     |     |     |      |
| <b>Standard anchorage depth <math>h_{ef}</math></b>                            |                 |      |  |                  |     |     |     |     |      |
| Effective anchorage depth  | $h_{ef}$        | [mm] | 40                                     | 44               | 48  | 65  | 80  | 100 |      |
| Spacing  | $S_{cr,N}$      | [mm] | 3 $h_{ef}$                             |                  |     |     |     |     |      |
| Edge distance  | $C_{cr,N}$      | [mm] | 1,5 $h_{ef}$                           |                  |     |     |     |     |      |
| <b>Reduced anchorage depth <math>h_{ef,red}</math></b>                         |                 |      |  |                  |     |     |     |     |      |
| Effective anchorage depth  | $h_{ef,red}$    | [mm] | 30 <sup>2)</sup>                       | 35 <sup>2)</sup> | 42  | 50  | 64  | 78  |      |
| Spacing  | $S_{cr,N}$      | [mm] | 3 $h_{ef}$                             |                  |     |     |     |     |      |
| Edge distance  | $C_{cr,N}$      | [mm] | 1,5 $h_{ef}$                           |                  |     |     |     |     |      |
| Factor for $k_1$   | $k_{ucr,N}$     | [-]  | 11,0                                   |                  |     |     |     |     |      |

1) Pullout failure is not decisive.

2) Use restricted to anchorages of indeterminate structural components.

**Wedge Anchor B**

**Performance**

Characteristic values for tension loads, stainless steel A4 / HCR

**Annex C2**



**Table C3: Characteristic values for shear loads, steel zinc plated**

| Anchor size  |                 |      | M6                | M8                | M10 | M12 | M16  | M20 |
|--|-----------------|------|-------------------|-------------------|-----|-----|------|-----|
| Installation factor  | $\gamma_{inst}$ | [-]  | 1,0               |                   |     |     |      |     |
| <b>Steel failure without lever arm</b>                       |                 |      |                   |                   |     |     |      |     |
| Characteristic resistance                                    | $V_{Rk,s}^0$    | [kN] | 5                 | 11                | 17  | 25  | 44   | 69  |
| Ductility factor   | $k_7$           | [-]  | 1,0               |                   |     |     |      |     |
| <b>Steel failure with lever arm</b>                          |                 |      |                   |                   |     |     |      |     |
| Characteristic bending resistance                            | $M_{Rk,s}^0$    | [Nm] | 9                 | 23                | 45  | 78  | 186  | 363 |
| Partial factor for $V_{Rk,s}^0$ and $M_{Rk,s}^0$             | $\gamma_{Ms}$   | [-]  | 1,25              |                   |     |     | 1,33 |     |
| <b>Concrete pry-out failure</b>                              |                 |      |                   |                   |     |     |      |     |
| Factor for $h_{ef}$  | $k_8$           | [-]  | 1,0               | 1,0               | 1,0 | 2,0 | 2,0  | 2,0 |
| Factor for $h_{ef,red}$                                      | $k_8$           | [-]  | 1,0 <sup>1)</sup> | 1,0 <sup>1)</sup> | 1,0 | 1,0 | 2,0  | 2,0 |
| <b>Concrete edge failure</b>                                 |                 |      |                   |                   |     |     |      |     |
| Effective length of anchor in shear loading for $h_{ef}$     | $l_f$           | [mm] | 40                | 44                | 48  | 65  | 82   | 100 |
| Effective length of anchor in shear loading for $h_{ef,red}$ | $l_f$           | [mm] | 30 <sup>1)</sup>  | 35 <sup>1)</sup>  | 42  | 50  | 64   | 78  |
| Outside diameter of anchor                                   | $d_{nom}$       | [mm] | 6                 | 8                 | 10  | 12  | 16   | 20  |

<sup>1)</sup> Use restricted to anchorages of indeterminate structural components

**Table C4: Characteristic values for shear loads, stainless steel A4/HCR**

| Anchor Size   |                 |      | M6                | M8                | M10 | M12 | M16 | M20 |
|---|-----------------|------|-------------------|-------------------|-----|-----|-----|-----|
| Installation factor   | $\gamma_{inst}$ | [-]  | 1,0               |                   |     |     |     |     |
| <b>Steel failure without lever arm</b>                        |                 |      |                   |                   |     |     |     |     |
| Characteristic resistance                                     | $V_{Rk,s}^0$    | [kN] | 7                 | 12                | 19  | 27  | 50  | 86  |
| Ductility factor  | $k_7$           | [-]  | 1,0               |                   |     |     |     |     |
| <b>Steel failure with lever arm</b>                           |                 |      |                   |                   |     |     |     |     |
| Characteristic bending resistance                             | $M_{Rk,s}^0$    | [Nm] | 10                | 24                | 49  | 85  | 199 | 454 |
| Partial factor for $V_{Rk,s}^0$ and $M_{Rk,s}^0$              | $\gamma_{Ms}$   | [-]  | 1,25              |                   |     |     | 1,4 |     |
| <b>Concrete pry-out failure</b>                               |                 |      |                   |                   |     |     |     |     |
| Factor for $h_{ef}$   | $k_8$           | [-]  | 1,0               | 1,0               | 1,0 | 2,0 | 2,0 | 2,0 |
| Factor for $h_{ef,red}$                                       | $k_8$           | [-]  | 1,0 <sup>1)</sup> | 1,0 <sup>1)</sup> | 1,0 | 1,0 | 2,0 | 2,0 |
| <b>Concrete edge failure</b>                                  |                 |      |                   |                   |     |     |     |     |
| Effective length of anchor in shear loading with $h_{ef}$     | $l_f$           | [mm] | 40                | 44                | 48  | 65  | 80  | 100 |
| Effective length of anchor in shear loading with $h_{ef,red}$ | $l_f$           | [mm] | 30 <sup>1)</sup>  | 35 <sup>1)</sup>  | 42  | 50  | 64  | 78  |
| Outside diameter of anchor                                    | $d_{nom}$       | [mm] | 6                 | 8                 | 10  | 12  | 16  | 20  |

<sup>1)</sup> Use restricted to anchorages of indeterminate structural components

**Wedge Anchor B**

**Performance**  
Characteristic values for shear loads

**Annex C3**

**Table C5: Displacements under tension loads, steel zinc plated**

| Anchor size                     |                    |      | M6  | M8  | M10 | M12  | M16  | M20  |
|---------------------------------|--------------------|------|-----|-----|-----|------|------|------|
| <b>Standard anchorage depth</b> |                    |      |     |     |     |      |      |      |
| Tension load                    | N                  | [kN] | 4,3 | 5,8 | 7,6 | 11,9 | 16,7 | 23,8 |
| Displacement                    | $\delta_{N0}$      | [mm] | 0,4 | 0,5 |     |      |      |      |
|                                 | $\delta_{N\infty}$ | [mm] | 0,7 | 2,3 |     |      |      |      |
| <b>Reduced anchorage depth</b>  |                    |      |     |     |     |      |      |      |
| Tension load                    | N                  | [kN] | 2,9 | 5,0 | 6,5 | 8,5  | 12,3 | 16,6 |
| Displacement                    | $\delta_{N0}$      | [mm] | 0,3 | 0,4 |     |      |      |      |
|                                 | $\delta_{N\infty}$ | [mm] | 0,6 | 1,8 |     |      |      |      |

**Table C6: Displacements under tension loads, stainless steel A4/HCR**

| Anchor size                     |                    |      | M6  | M8  | M10 | M12  | M16  | M20  |
|---------------------------------|--------------------|------|-----|-----|-----|------|------|------|
| <b>Standard anchorage depth</b> |                    |      |     |     |     |      |      |      |
| Tension load                    | N                  | [kN] | 3,6 | 5,7 | 7,6 | 11,9 | 17,2 | 24,0 |
| Displacement                    | $\delta_{N0}$      | [mm] | 0,7 | 0,9 | 0,5 | 0,6  | 0,9  | 2,1  |
|                                 | $\delta_{N\infty}$ | [mm] | 1,8 |     |     |      |      | 4,2  |
| <b>Reduced anchorage depth</b>  |                    |      |     |     |     |      |      |      |
| Tension load                    | N                  | [kN] | 2,9 | 4,3 | 5,7 | 8,5  | 12,3 | 16,6 |
| Displacement                    | $\delta_{N0}$      | [mm] | 0,4 | 0,7 | 0,4 | 0,4  | 0,6  | 1,5  |
|                                 | $\delta_{N\infty}$ | [mm] | 1,3 |     |     |      |      | 2,9  |

**Table C7: Displacements under shear loads, steel zinc plated**

| Anchor size  |                    |      | M6  | M8  | M10 | M12  | M16  | M20  |
|--------------|--------------------|------|-----|-----|-----|------|------|------|
| Shear load   | V                  | [kN] | 2,9 | 6,3 | 9,7 | 14,3 | 23,6 | 37,0 |
| Displacement | $\delta_{V0}$      | [mm] | 1,2 | 1,5 | 1,6 | 2,6  | 3,1  | 4,4  |
|              | $\delta_{V\infty}$ | [mm] | 2,4 | 2,2 | 2,4 | 3,9  | 4,6  | 6,6  |

**Table C8: Displacements under shear loads, stainless steel A4/HCR**

| Anchor Size  |                    |      | M6  | M8  | M10  | M12  | M16  | M20  |
|--------------|--------------------|------|-----|-----|------|------|------|------|
| Shear load   | V                  | [kN] | 4,0 | 6,9 | 10,9 | 15,4 | 28,6 | 43,7 |
| Displacement | $\delta_{V0}$      | [mm] | 1,1 | 2,0 | 1,2  | 2,0  | 2,2  | 2,1  |
|              | $\delta_{V\infty}$ | [mm] | 1,7 | 3,0 | 1,8  | 3,0  | 3,3  | 3,2  |

**Wedge Anchor B**Performance  
Displacements**Annex C4**