

DÉCLARATION DES PERFORMANCES

Numéro de DoP: MKT-1.3-100_fr

- ◇ **Code d'identification unique du produit type:** Vis béton BSZ
- ◇ **Usage(s) prévu(s):** Cheville mécanique dans le béton,
voir l'annexe/Annex B
- ◇ **Fabricant:** MKT Metall-Kunststoff-Technik GmbH & Co.KG
Auf dem Immel 2
67685 Weilerbach
- ◇ **Le ou les systèmes d'évaluation et de vérification de la constance des performances du produit de construction:** 1
- ◇ **Document d'évaluation européen:** EAD 330011-00-0601 + EAD 330232-00-0601
Évaluation technique européenne: ETA-16/0204, 27.11.2020
Organisme d'évaluation technique: DIBt, Berlin
Organisme(s) notifié(s): NB 2873 – Technische Universität Darmstadt
- ◇ **Performance(s) déclarée(s):**

| Caractéristiques essentielles | Performances |
|--|-------------------------------|
| Résistance mécanique et stabilité (BWR 1) | |
| Résistances caractéristiques sous traction (effets statiques et quasi statiques) | Annexe / Annex C1 |
| Résistance caractéristique sous contrainte transversale (effets statiques et quasi statiques) | Annexe / Annex C1 |
| Résistances caractéristiques et déplacements pour les catégories de performance sismique C1 + C2 | Annexe / Annex C2, C3, C4, C7 |
| Décalage (effets statiques et quasi statiques) | Annexe / Annex C6 |
| Durabilité | Annexe / Annex B1 |
| Sécurité en cas d'incendie (BWR 2) | |
| Le comportement du feu | Classe A1 |
| Résistance au feu | Annexe / Annex C5 |

Les performances du produit identifié ci-dessus sont conformes aux performances déclarées. Conformément au règlement (EU) no 305/2011, la présente déclaration des performances est établie sous la seule responsabilité du fabricant mentionné ci-dessus.

Signé pour le fabricant et en son nom par:


Stefan Weustenhagen
(Directeur général)
Weilerbach, 27.11.2020

p.p. 
Dipl.-Ing. Detlef Bigalke
(Directeur du développement
de produits)



L'original de cette déclaration des performances a été rédigé en allemand. En cas de divergences dans la traduction, la version allemande fait foi.

Specifications of Intended use

| Concrete screw BSZ | | BSZ 6 | | BSZ 8 | | | BSZ 10 | | | BSZ 12 | | | BSZ 14 | | |
|--|--|-------|----|-------|----|----|--------|----|----|--------|----|-----|--------|-----|-----|
| Nominal embedment depth h_{nom} [mm] | | 40 | 55 | 45 | 55 | 65 | 55 | 75 | 85 | 65 | 85 | 100 | 75 | 100 | 115 |
| Anchorage subject to | Static or quasi-static loading | ✓ | | | | | | | | | | | | | |
| | Fire exposure | ✓ | | | | | | | | | | | | | |
| | Seismic action C1 | ✓ | - | ✓ | ✓ | - | ✓ | - | ✓ | - | ✓ | - | ✓ | - | ✓ |
| | Seismic action C2, BSZ zinc plated | - | - | ✓ | - | - | ✓ | - | - | ✓ | - | ✓ | - | ✓ | - |
| Base material | Cracked or uncracked concrete | ✓ | | | | | | | | | | | | | |
| | Reinforced or unreinforced concrete (without fibres) acc. to EN 206:2013 | ✓ | | | | | | | | | | | | | |
| | Strength classes according to EN 206:2013: C20/25 to C50/60 | ✓ | | | | | | | | | | | | | |

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc plated steel, stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure including industrial and marine environment or exposure to permanently damp internal condition, if no particular aggressive conditions exist (stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure and to permanently damp internal condition, if other particular aggressive conditions exist (high corrosion resistant steel)

Note: Particular aggressive conditions are e.g. permanent, alternation immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where deicing materials are used)

Design:

- Anchorage are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.)
- Design method of anchorages according to EN 1992-4:2018 and EOTA Technical Report TR 055.

Installation:

- Making of drill hole by hammer drilling (all sizes) or vacuum drill bit (BSZ 8 – BSZ 14). When using a vacuum drill bit no drill hole cleaning is required.
- Anchor installation carried out by appropriately qualified personal and under the responsibility of the person responsible for technical matters on site.
- After installation further turning of the anchor is not possible. The head of the anchor is supported on the fixture and is not damaged.
- The borehole may be filled with the Injection Systems VME or VME plus.
- Adjustment according to Annex B5: for concrete screw BSZ 8 to BSZ 14, all anchorage depths

Concrete Screw BSZ

Intended use
Specifications

Annex B1

Table B1: Installation parameters

| Anchor size | | | BSZ 6 | | BSZ 8 | | | BSZ 10 | | | BSZ 12 | | | BSZ 14 | | |
|---|-----------------|------|-------|----|-------|----|----|--------|----|----|--------|----|-----|--------|-----|-----|
| Nominal embedment depth | h_{nom} | [mm] | 40 | 55 | 45 | 55 | 65 | 55 | 75 | 85 | 65 | 85 | 100 | 75 | 100 | 115 |
| Nominal drill bit diameter | d_0 | [mm] | 6 | | 8 | | | 10 | | | 12 | | | 14 | | |
| Cutting diameter of drill bit | $d_{cut} \leq$ | [mm] | 6,40 | | 8,45 | | | 10,45 | | | 12,50 | | | 14,50 | | |
| Effective anchorage depth | h_{ef} | [mm] | 31 | 44 | 35 | 43 | 52 | 43 | 60 | 68 | 50 | 67 | 80 | 58 | 79 | 92 |
| Depth of drill hole | $h_0 \geq$ | [mm] | 45 | 60 | 55 | 65 | 75 | 65 | 85 | 95 | 75 | 95 | 110 | 85 | 110 | 125 |
| Diameter of clearance hole in the fixture | $d_f \leq$ | [mm] | 8 | | 12 | | | 14 | | | 16 | | | 18 | | |
| Max. installation torque for screws with metric connection thread | $T_{inst} \leq$ | [Nm] | 10 | | 20 | | | 40 | | | 60 | | | 80 | | |
| Tangential impact screw driver ¹⁾ | $T_{imp,max}$ | [Nm] | 160 | | 300 | | | 400 | | | 650 | | | 650 | | |

¹⁾ Installation with tangential impact screw driver, with maximum power output $T_{imp,max}$ acc. to manufacturer's instructions is possible

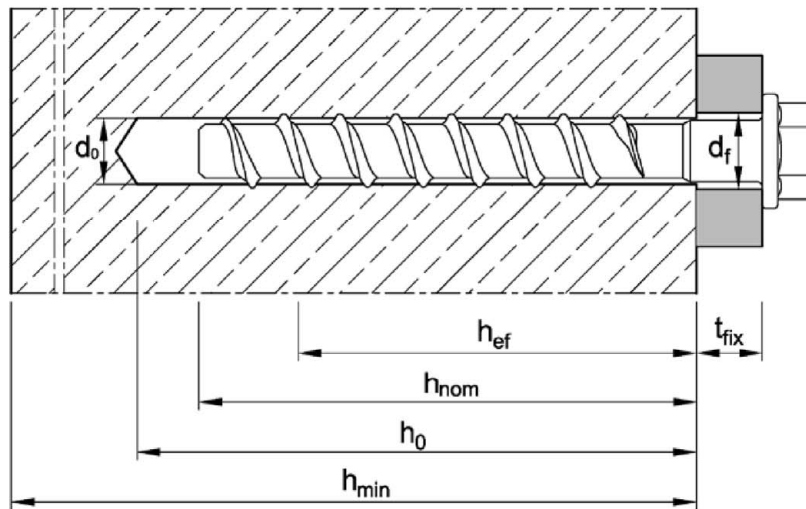


Table B2: Minimum thickness of member, minimum edge distance and minimum spacing

| Anchor size | | | BSZ 6 | | BSZ 8 | | | BSZ 10 | | | BSZ 12 | | | BSZ 14 | | |
|-----------------------------|-----------|------|-------|----|-------|----|----|--------|----|-----|--------|-----|-----|--------|-----|-----|
| Nominal embedment depth | h_{nom} | [mm] | 40 | 55 | 45 | 55 | 65 | 55 | 75 | 85 | 65 | 85 | 100 | 75 | 100 | 115 |
| Minimum thickness of member | h_{min} | [mm] | 80 | | 80 | | | 80 | 90 | 102 | 80 | 101 | 120 | 87 | 119 | 138 |
| Minimum spacing | s_{min} | [mm] | 40 | 40 | 50 | 50 | | | 50 | 70 | 50 | 70 | 50 | 70 | | |
| Minimum edge distance | c_{min} | [mm] | 40 | 40 | 50 | 50 | | | 50 | 70 | 50 | 70 | 50 | 70 | | |

Concrete Screw BSZ

Intended use

Installation parameters / Minimum thickness of concrete member, minimum spacing and edge distance

Annex B2

Installation instructions

Drill hole preparation and cleaning

| | | |
|---|--|--|
| 1 | | <p>Drill hole perpendicular to concrete surface. Using a vacuum drill, continue with step 3.</p> |
| 2 | | <p>Blow out dust or alternatively vacuum clean down to the bottom of the hole.</p> |

Installation concrete screw

| | | |
|---|--|--|
| 3 | | <p>Screw in, e.g. with tangential impact screw driver or torque wrench.</p> |
| 4 | | <p>After installation, the head of the anchor is supported on the fixture and must be undamaged.</p> |

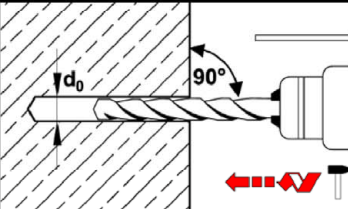
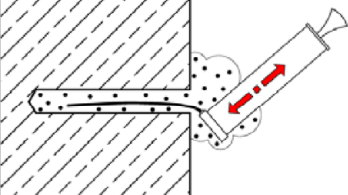
Concrete Screw BSZ

Intended use
Installation instructions

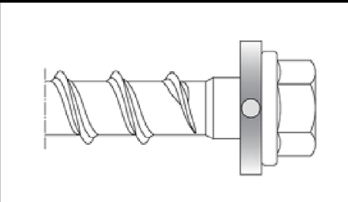
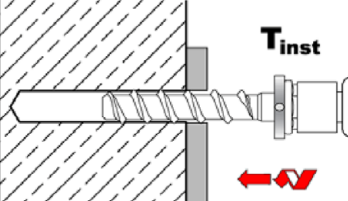
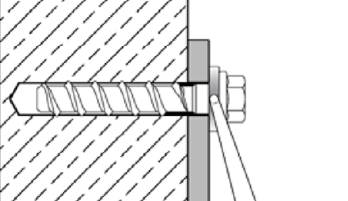
Annex B3

Installation instructions - filling of annular gap

Drill hole preparation and cleaning


| | | |
|---|---|---|
| 1 |  | Drill hole perpendicular to concrete surface. Using a vacuum drill, continue with step 3. |
| 2 |  | Blow out dust or alternatively vacuum clean down to the bottom of the hole. |

Installation concrete screw with filling washer


| | | |
|---|---|--|
| 3 |  | Fit the filling washer to the concrete screw. The thickness of the filling washer must be taken into account with t_{fix} . |
| 4 |  | Screw in, e.g. with tangential impact screw driver or torque wrench. |
| 5 |  | Fill the annular gap between concrete screw and fixture with mortar (compressive strength $\geq 40 \text{ N/mm}^2$, e.g. Injection mortar VMH, VMZ or VMU plus). Use enclosed reducing adapter. Observe information on processing of the mortar! The annular gap is completely filled, when excess mortar seeps out. |

For seismic loading, the application with and without filling of annular gap is permitted (Annex C3-C4).

Filling washer and reducing adapter for filling the annular gap between concrete screw and fixture



thickness of filling washer
 $t = 5 \text{ mm}$



Concrete Screw BSZ

Intended use

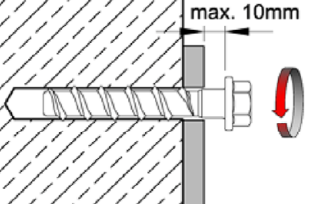
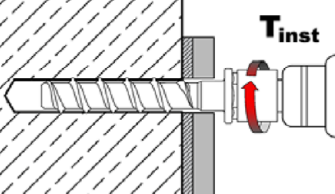
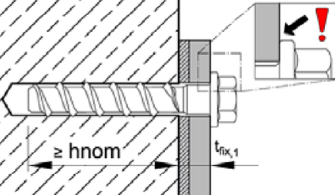
Installation instructions with filling of annular gap

Annex B4

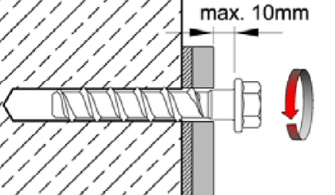
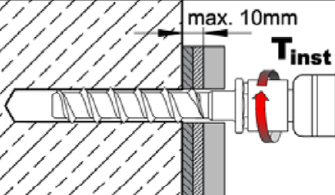
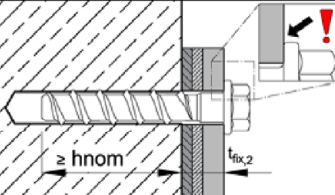
Installation instructions - Adjustment

Step 1 - 4 according to Annex B3

1. Adjustment

| | | |
|---|---|---|
| 5 |  | Screw may be untightened maximum 10mm. |
| 6 |  | After adjustment, screw in the concrete screw with tangential impact screw driver or torque wrench. |
| 7 |  | After installation, the head of the anchor is supported on the fixture must be undamaged. |

2. Adjustment

| | | |
|----|---|---|
| 8 |  | Screw may be untightened maximum 10mm. |
| 9 |  | After adjustment, screw in the concrete screw with tangential impact screw driver or torque wrench. |
| 10 |  | After installation, the head of the anchor is supported on the fixture and must be undamaged. |

- adjustment is permitted for fixings with concrete screws size BSZ 8 - BSZ 14, all anchorage depths
- the fastener may be adjusted max. 2x. The fastener must not be screwed back by more than 10mm in each case. The relining carried out during adjustment must not exceed 10 mm in total. Nominal embedment depth h_{nom} must still be maintained after the adjustment.

Concrete Screw BSZ

Intended use
Installation instructions - Adjustment

Annex B5

Table C1: Characteristic values for static or quasi-static loads

| Anchor size | | | BSZ 6 | | BSZ 8 | | | BSZ 10 | | | BSZ 12 | | | BSZ 14 | | | | | |
|---|-----------------|-------------|---|-----|-------|-----|------|--------|------|--------------------------|--------|--------------------------|------|--------|--------------------------|-----|------|-----|--|
| Nominal embedment depth | h_{nom} | [mm] | 40 | 55 | 45 | 55 | 65 | 55 | 75 | 85 | 65 | 85 | 100 | 75 | 100 | 115 | | | |
| Installation factor | γ_{inst} | [-] | 1,0 | | | | | | | | | | | | | | | | |
| Tension load | | | | | | | | | | | | | | | | | | | |
| Steel failure | | | | | | | | | | | | | | | | | | | |
| Characteristic resistance | $N_{Rk,s}$ | [kN] | 14 | | 27 | | | 45 | | | 67 | | | 94 | | | | | |
| Partial factor | $\gamma_{Ms,N}$ | [-] | 1,5 | | | | | | | | | | | | | | | | |
| Pull-out | | | | | | | | | | | | | | | | | | | |
| Characteristic resistance in concrete C20/25 | cracked | $N_{Rk,p}$ | [kN] | 2,0 | 4,0 | 5,0 | 9,0 | 12 | 9,0 | $\geq N^{0}_{Rk,c}{}^1)$ | 12 | $\geq N^{0}_{Rk,c}{}^1)$ | | | $\geq N^{0}_{Rk,c}{}^1)$ | | | | |
| | uncracked | $N_{Rk,p}$ | [kN] | 4,0 | 9,0 | 7,5 | 12 | 16 | 12 | 20 | 26 | 16 | | | | | | | |
| Increasing factor for $N_{Rk,p}$ | Ψ_C | [-] | $\left(\frac{f_{ck}}{20}\right)^{0,5}$ | | | | | | | | | | | | | | | | |
| Concrete cone failure | | | | | | | | | | | | | | | | | | | |
| Effective anchorage depth | h_{ef} | [mm] | 31 | 44 | 35 | 43 | 52 | 43 | 60 | 68 | 50 | 67 | 80 | 58 | 79 | 92 | | | |
| Spacing | $s_{cr,N}$ | [mm] | 3 h_{ef} | | | | | | | | | | | | | | | | |
| Edge distance | $c_{cr,N}$ | [mm] | 1,5 h_{ef} | | | | | | | | | | | | | | | | |
| Factor k_1 | cracked | $k_{cr,N}$ | 7,7 | | | | | | | | | | | | | | | | |
| | uncracked | $k_{ucr,N}$ | 11,0 | | | | | | | | | | | | | | | | |
| Splitting | | | | | | | | | | | | | | | | | | | |
| Characteristic resistance | $N^{0}_{Rk,sp}$ | [kN] | $\min [N_{Rk,p}; N^{0}_{Rk,c}{}^1)]$ | | | | | | | | | | | | | | | | |
| Spacing | $s_{cr,sp}$ | [mm] | 120 | 160 | 120 | 140 | 150 | 140 | 180 | 210 | 150 | 210 | 240 | 180 | 240 | 280 | | | |
| Edge distance | $c_{cr,sp}$ | [mm] | 60 | 80 | 60 | 70 | 75 | 70 | 90 | 105 | 75 | 105 | 120 | 90 | 120 | 140 | | | |
| Shear load | | | | | | | | | | | | | | | | | | | |
| Steel failure <u>without</u> lever arm | | | | | | | | | | | | | | | | | | | |
| Characteristic resistance | $V^{0}_{Rk,s}$ | [kN] | 7,0 | | 13,5 | | 17,0 | | 22,5 | | 34,0 | | 33,5 | | 42,0 | | 56,0 | | |
| Partial factor | $\gamma_{Ms,V}$ | [-] | 1,25 | | | | | | | | | | | | | | | | |
| Ductility factor | k_7 | [-] | 0,8 | | | | | | | | | | | | | | | | |
| Steel failure <u>with</u> lever arm | | | | | | | | | | | | | | | | | | | |
| Characteristic bending resistance | $M^{0}_{Rk,s}$ | [Nm] | 10,9 | | 26 | | | 56 | | | 113 | | | 185 | | | | | |
| Concrete pry-out failure | | | | | | | | | | | | | | | | | | | |
| Pry-out factor | k_8 | [-] | 1,0 | | 1,0 | | | 1,0 | | 2,0 | | 1,0 | | 2,0 | | 1,0 | | 2,0 | |
| Concrete edge failure | | | | | | | | | | | | | | | | | | | |
| Effective length of anchor | $l_f = h_{ef}$ | [mm] | 31 | 44 | 35 | 43 | 52 | 43 | 60 | 68 | 50 | 67 | 80 | 58 | 79 | 92 | | | |
| Outside diameter of anchor | d_{nom} | [mm] | 6 | | 8 | | | 10 | | | 12 | | | 14 | | | | | |

¹⁾ $N^{0}_{Rk,c}$ according to EN 1992-4:2018

Concrete Screw BSZ
Performance
 Characteristic values for **static** or **quasi-static** loads

Annex C1

Table C2: Characteristic resistance for seismic loading, performance category C1

| Anchor size | | | BSZ 6 | | BSZ 8 | BSZ 10 | | BSZ 12 | BSZ 14 | |
|---|--------------------------------|----------------|--------------|-----|-------|--------|---------------------------------|--------|--------|--|
| Nominal embedment depth | h_{nom} | [mm] | 40 | 55 | 65 | 55 | 85 | 100 | 115 | |
| Installation factor | γ_{inst} | [-] | 1,0 | | | | | | | |
| Tension load | | | | | | | | | | |
| Steel failure | | | | | | | | | | |
| Characteristic resistance | $N_{Rk,s,eq}$ | [kN] | 14 | 27 | 45 | 67 | 94 | | | |
| Partial factor | γ_{Ms} | [-] | 1,5 | | | | | | | |
| Pull-out | | | | | | | | | | |
| Characteristic resistance | $N_{Rk,p,eq}$ | [kN] | 2,0 | 4,0 | 12 | 9,0 | $\geq N^0_{Rk,c}$ ¹⁾ | | | |
| Concrete cone failure | | | | | | | | | | |
| Effective anchorage depth | h_{ef} | [mm] | 31 | 44 | 52 | 43 | 68 | 80 | 92 | |
| Spacing | $s_{cr,N}$ | [mm] | 3 h_{ef} | | | | | | | |
| Edge distance | $c_{cr,N}$ | [mm] | 1,5 h_{ef} | | | | | | | |
| Shear load | | | | | | | | | | |
| Steel failure <u>without</u> lever arm | | | | | | | | | | |
| Characteristic resistance | $V_{Rk,s,eq}$ | [kN] | 4,7 | 5,5 | 8,5 | 13,5 | 15,3 | 21,0 | 22,4 | |
| Partial factor | γ_{Ms} | [-] | 1,25 | | | | | | | |
| Concrete pry-out failure | | | | | | | | | | |
| Pry-out factor | k_8 | [-] | 1,0 | | | | 2,0 | | | |
| Concrete edge failure | | | | | | | | | | |
| Effective length of anchor | $l_f = h_{ef}$ | [mm] | 31 | 44 | 52 | 43 | 68 | 80 | 92 | |
| Outside diameter of anchor | d_{nom} | [mm] | 6 | | 8 | 10 | | 12 | 14 | |
| Factor for annular gap | with filling of annular gap | α_{gap} | [-] | | | | 1,0 | | | |
| | without filling of annular gap | α_{gap} | [-] | | | | 0,5 | | | |

¹⁾ $N^0_{Rk,c}$ for concrete strength class C20/25, according to EN 1992-4:2018

Concrete Screw BSZ

Performance

Characteristic resistance for **seismic loading**, performance category **C1**

Annex C2

Table C3: Characteristic resistance for seismic loading, performance category C2, with filling of annular gap, concrete screw BSZ zinc plated

| Anchor size | | | BSZ 8 | BSZ 10 | BSZ 12 | BSZ 14 |
|--|-----------------|------|-------------|--------|--------|--------|
| Nominal embedment depth | h_{nom} | [mm] | 65 | 85 | 100 | 115 |
| Installation factor | γ_{inst} | [-] | 1,0 | | | |
| Tension load | | | | | | |
| Steel failure | | | | | | |
| Characteristic resistance | $N_{Rk,s,eq}$ | [kN] | 27 | 45 | 67 | 94 |
| Partial factor | γ_{Ms} | [-] | 1,5 | | | |
| Pull-out | | | | | | |
| Characteristic resistance | $N_{Rk,p,eq}$ | [kN] | 2,4 | 5,4 | 7,1 | 10,5 |
| Concrete cone failure | | | | | | |
| Effective anchorage depth | h_{ef} | [mm] | 52 | 68 | 80 | 92 |
| Spacing | $s_{cr,N}$ | [mm] | $3h_{ef}$ | | | |
| Edge distance | $c_{cr,N}$ | [mm] | $1,5h_{ef}$ | | | |
| Shear load | | | | | | |
| Steel failure without lever arm | | | | | | |
| Characteristic resistance | $V_{Rk,s,eq}$ | [kN] | 9,9 | 18,5 | 31,6 | 40,7 |
| Partial factor | γ_{Ms} | [-] | 1,25 | | | |
| Concrete pry-out failure | | | | | | |
| Pry-out factor | k_8 | [-] | 1,0 | 2,0 | | |
| Concrete edge failure | | | | | | |
| Effective length of anchor | $l_f = h_{ef}$ | [mm] | 52 | 68 | 80 | 92 |
| Outside diameter of anchor | d_{nom} | [mm] | 8 | 10 | 12 | 14 |
| Factor for annular gap with filling of annular gap | α_{gap} | [-] | 1,0 | | | |

Concrete Screw BSZ

Performance

Characteristic resistance for **seismic loading**, performance category **C2**
with filling of annular gap

Annex C3

Table C4: Characteristic resistance for seismic loading, performance category C2, without filling of annular gap, concrete screw BSZ zinc plated

| Anchor size | | | BSZ 8 | BSZ 10 | BSZ 12 | BSZ 14 | |
|---|---------------------------|---------------|--------------|--------|--------|-------------------------|------|
| Nominal embedment depth | h_{nom} | [mm] | 65 | 85 | 100 | 115 | |
| Installation factor | γ_{inst} | [-] | 1,0 | | | | |
| Tension loads | | | | | | | |
| Hexagon head | Steel failure | | | | | | |
| | Characteristic resistance | $N_{Rk,s,eq}$ | [kN] | 27 | 45 | 67 | 94 |
| | Partial factor | γ_{Ms} | [-] | 1,5 | | | |
| | Pull-out | | | | | | |
| | Characteristic resistance | $N_{Rk,p,eq}$ | [kN] | 2,4 | 5,4 | 7,1 | 10,5 |
| Countersunk head | Steel failure | | | | | | |
| | Characteristic resistance | $N_{Rk,s,eq}$ | [kN] | 27 | 45 | no performance assessed | |
| | Partial factor | γ_{Ms} | [-] | 1,5 | | | |
| | Pull-out | | | | | | |
| | Characteristic resistance | $N_{Rk,p,eq}$ | [kN] | 2,4 | 5,4 | no performance assessed | |
| Concrete cone failure | | | | | | | |
| Effective anchorage depth | h_{ef} | [mm] | 52 | 68 | 80 | 92 | |
| Spacing | $s_{cr,N}$ | [mm] | 3 h_{ef} | | | | |
| Edge distance | $c_{cr,N}$ | [mm] | 1,5 h_{ef} | | | | |
| Shear loads | | | | | | | |
| Steel failure without lever arm | | | | | | | |
| Hexagon head | Characteristic resistance | $V_{Rk,s,eq}$ | [kN] | 10,3 | 21,9 | 24,4 | 23,3 |
| | Partial factor | γ_{Ms} | [-] | 1,25 | | | |
| Counter-sunk head | Characteristic resistance | $V_{Rk,s,eq}$ | [kN] | 3,6 | 13,7 | no performance assessed | |
| | Partial factor | γ_{Ms} | [-] | 1,25 | | | |
| Concrete pry-out failure | | | | | | | |
| Pry-out factor | k_8 | [-] | 1,0 | 2,0 | | | |
| Concrete edge failure | | | | | | | |
| Effective length of anchor | $l_f = h_{ef}$ | [mm] | 52 | 68 | 80 | 92 | |
| Outside diameter of anchor | d_{nom} | [mm] | 8 | 10 | 12 | 14 | |
| Factor for annular gap without filling of annular gap | α_{gap} | [-] | 0,5 | | | | |

Concrete Screw BSZ

Performance
 Characteristic resistance for **seismic loading**, performance category **C2**
without filling of annular gap

Annex C4

Table C5: Characteristic values of resistance under fire exposure

| Anchor size | | | BSZ 6 | | BSZ 8 | | | BSZ 10 | | | BSZ 12 | | | BSZ 14 | | |
|---|-------------|-------------------------------------|------------|-----|-------|-----|----|--------|----|------|--------|------|-----|--------|-----|-----|
| Nominal anchorage depth | h_{nom} | [mm] | 40 | 55 | 45 | 55 | 65 | 55 | 75 | 85 | 65 | 85 | 100 | 75 | 100 | 115 |
| Steel failure (tension and shear resistance) | | | | | | | | | | | | | | | | |
| Characteristic resistance | R30 | $N_{RK,s,fi}$ = $V_{RK,s,fi}$ | [kN] | 0,9 | | 2,4 | | 4,4 | | 7,3 | | 10,3 | | | | |
| | R60 | | | 0,8 | | 1,7 | | 3,3 | | 5,8 | | 8,2 | | | | |
| | R90 | | | 0,6 | | 1,1 | | 2,3 | | 4,2 | | 5,9 | | | | |
| | R120 | | | 0,4 | | 0,7 | | 1,7 | | 3,4 | | 4,8 | | | | |
| Steel failure <u>with</u> lever arm | | | | | | | | | | | | | | | | |
| Characteristic bending resistance | R30 | $M^0_{RK,s,fi}$ | [Nm] | 0,7 | | 2,4 | | 5,9 | | 12,3 | | 20,4 | | | | |
| | R60 | | | 0,6 | | 1,8 | | 4,5 | | 9,7 | | 15,9 | | | | |
| | R90 | | | 0,5 | | 1,2 | | 3,0 | | 7,0 | | 11,6 | | | | |
| | R120 | | | 0,3 | | 0,9 | | 2,3 | | 5,7 | | 9,4 | | | | |
| Edge distance | $c_{cr,fi}$ | [mm] | 2 h_{ef} | | | | | | | | | | | | | |
| In case of fire attack from more than one side, the minimum edge distance shall be ≥ 300 mm | | | | | | | | | | | | | | | | |
| Spacing | $s_{cr,fi}$ | [mm] | 4 h_{ef} | | | | | | | | | | | | | |
| The characteristic resistance for pull-out $N_{RK,p,fi}$, concrete cone failure $N^0_{RK,c,fi}$, concrete pry-out $V_{RK,cp,fi}$ and concrete edge failure $V^0_{RK,c,fi}$ shall be calculated according to EN 1992-4:2018. | | | | | | | | | | | | | | | | |
| The anchorage depth has to be increased for wet concrete by at least 30 mm compared to the given values | | | | | | | | | | | | | | | | |

Concrete Screw BSZ

Performance
Characteristic values of resistance under **fire exposure**

Annex C5

Table C6: Displacements under static or quasi-static loads

| Anchor size | | | BSZ 6 | | BSZ 8 | | | BSZ 10 | | | BSZ 12 | | | BSZ 14 | | | |
|-------------------------|--------------------|--------------------|-------|-----|-------|-----|-----|--------|-----|------|--------|------|------|--------|------|------|-----|
| Nominal embedment depth | h_{nom} | [mm] | 40 | 55 | 45 | 55 | 65 | 55 | 75 | 85 | 65 | 85 | 100 | 75 | 100 | 115 | |
| Tension load | | | | | | | | | | | | | | | | | |
| cracked concrete | Tension load | N [kN] | 0,95 | 1,9 | 2,4 | 4,3 | 5,7 | 4,3 | 7,9 | 9,6 | 5,7 | 9,4 | 12,3 | 7,6 | 12,0 | 15,1 | |
| | Displacement | δ_{N0} | [mm] | 0,3 | 0,6 | 0,6 | 0,7 | 0,8 | 0,6 | 0,5 | 0,9 | 0,9 | 0,5 | 1,0 | 0,5 | 0,8 | 0,7 |
| | | $\delta_{N\infty}$ | [mm] | 0,4 | 0,4 | 0,6 | 1,0 | 0,9 | 0,4 | 1,2 | 1,2 | 1,0 | 1,2 | 1,2 | 0,9 | 1,2 | 1,0 |
| uncracked concrete | Tension load | N [kN] | 1,9 | 4,3 | 3,6 | 5,7 | 7,6 | 5,7 | 9,5 | 11,9 | 7,6 | 13,2 | 17,2 | 10,6 | 16,9 | 21,2 | |
| | Displacement | δ_{N0} | [mm] | 0,4 | 0,6 | 0,7 | 0,9 | 0,5 | 0,7 | 1,1 | 1,0 | 1,0 | 1,1 | 1,2 | 0,9 | 1,2 | 0,8 |
| | | $\delta_{N\infty}$ | [mm] | 0,4 | 0,4 | 0,6 | 1,0 | 0,9 | 0,4 | 1,2 | 1,2 | 1,0 | 1,2 | 1,2 | 0,9 | 1,2 | 1,0 |
| Shear load | | | | | | | | | | | | | | | | | |
| | Shear load | V [kN] | 3,3 | | 8,6 | | | 16,2 | | | 20,0 | | | 30,5 | | | |
| Displacement | δ_{V0} | [mm] | 1,55 | | 2,7 | | | 2,7 | | | 4,0 | | | 3,1 | | | |
| | $\delta_{V\infty}$ | [mm] | 3,1 | | 4,1 | | | 4,3 | | | 6,0 | | | 4,7 | | | |

Concrete Screw BSZ

Performance
Displacements under static or quasi-static loads

Annex C6

Table C7: Displacements under **seismic loading**, performance category **C2**
with filling of annular gap, concrete screw BSZ zinc plated

| Anchor size | | | BSZ 8 | BSZ 10 | BSZ 12 | BSZ 14 |
|-------------------------|----------------------|------|-------|--------|--------|--------|
| Nominal embedment depth | h_{nom} | [mm] | 65 | 85 | 100 | 115 |
| Tension load | | | | | | |
| Displacement DLS | $\delta_{N,eq(DLS)}$ | [mm] | 0,66 | 0,32 | 0,57 | 1,16 |
| Displacement ULS | $\delta_{N,eq(ULS)}$ | [mm] | 1,74 | 1,36 | 2,36 | 4,39 |
| Shear load | | | | | | |
| Displacement DLS | $\delta_{V,eq(DLS)}$ | [mm] | 1,68 | 2,91 | 1,88 | 2,42 |
| Displacement ULS | $\delta_{V,eq(ULS)}$ | [mm] | 5,19 | 6,72 | 5,37 | 9,27 |

Table C8: Displacements under **seismic loading**, performance category **C2**
without filling of annular gap, concrete screw BSZ zinc plated

| Anchor size | | | BSZ 8 | BSZ 10 | BSZ 12 | BSZ 14 |
|-----------------------------------|----------------------|------|-------|--------|--------|--------|
| Nominal embedment depth | h_{nom} | [mm] | 65 | 85 | 100 | 115 |
| Tension load | | | | | | |
| Type with hexagon head | | | | | | |
| Displacement DLS | $\delta_{N,eq(DLS)}$ | [mm] | 0,66 | 0,32 | 0,57 | 1,16 |
| Displacement ULS | $\delta_{N,eq(ULS)}$ | [mm] | 1,74 | 1,36 | 2,36 | 4,39 |
| Type with countersunk head | | | | | | |
| Displacement DLS | $\delta_{N,eq(DLS)}$ | [mm] | 0,66 | 0,32 | - | - |
| Displacement ULS | $\delta_{N,eq(ULS)}$ | [mm] | 1,74 | 1,36 | - | - |
| Shear load | | | | | | |
| Type with hexagon head | | | | | | |
| Displacement DLS | $\delta_{V,eq(DLS)}$ | [mm] | 4,21 | 4,71 | 4,42 | 5,60 |
| Displacement ULS | $\delta_{V,eq(ULS)}$ | [mm] | 7,13 | 8,83 | 6,95 | 12,63 |
| Type with countersunk head | | | | | | |
| Displacement DLS | $\delta_{V,eq(DLS)}$ | [mm] | 2,51 | 2,98 | - | - |
| Displacement ULS | $\delta_{V,eq(ULS)}$ | [mm] | 7,76 | 6,25 | - | - |

Concrete Screw BSZ

Performance
Displacements under **seismic loading**, performance category **C2**

Annex C7