



... eine starke Verbindung

YDEEVNEDEKLARATION

DoP Nr.: **MKT-1.2-301_da**

- ❖ **Varetypens unikke identifikationskode:** **Negleanker N**
- ❖ **Tilsligtet anvendelse:** Spoler til forankring i beton til overflødige ikke-bærende systeme, se bilag / Annex B
- ❖ **Fabrikant:** MKT Metall-Kunststoff-Technik GmbH & Co.KG
Auf dem Immel 2
67685 Weilerbach
- ❖ **System eller systemer til vurdering og kontrol af konstansen af ydeevnen:** 2+
- ❖ **Europæisk vurderingsdokument:** **EAD 330747-00-0601**
Europæisk teknisk vurdering: **ETA-11/0240, 21.12.2021**
Teknisk vurderingsorgan: DIBt, Berlin
Notificeret organ/notificerede organer: NB 2873 – Technische Universität Darmstadt
- ❖ **Deklareret ydeevne/deklarerede ydeevner:**

Væsentlige funktioner	Ydeevne
Brandsikring (BWR 2)	
Brandegenskaber	Klasse A1
Brandsikkerhed	Bilag/Annex C2
Sikkerhed under brug (BWR 4)	
Karakteristisk modstand for alle belastningsretninger og alle fejtilstande til den forenkede designmetode	Bilag/Annex B2, C1
Holdbarhed	Bilag/Annex B1


Ydeevnen for den vare, der er anført ovenfor, er i overensstemmelse med den deklarerede ydeevne. Denne ydeevnedeklaration er udarbejdet i overensstemmelse med forordning (EU) nr. 305/2011 på eneansvar af den fabrikant, der er anført ovenfor.

Underskrevet for fabrikanten og på dennes vegne af:


Stefan Weustenhagen
(CEO)

Weilerbach, 21.12.2021

p.p.


Dipl.-Ing. Detlef Bigalke
(Leder af produktudvikling)



Originalen af denne erklæringserklæring blev skrevet på tysk. I tilfælde af afvigelser i oversættelsen er den tyske udgave gyldig.

Specifications of intended use

Nail Anchor	N6 Thread M6	N8 Thread M6	N-K Nail head	N-M Coupling nut	N-O Loop
Static or quasi-static action	✓				
Fire exposure	R30 / R60 / R90 / R120				
Cracked or uncracked concrete	✓				
Strength classes C12/15 to C50/60 according to EN 206:2013 + A1:2016	✓				
Compacted, reinforced or unreinforced normal weight concrete, without fibres according to EN 206:2013 + A1:2016	✓				

Use conditions (environmental conditions):	Effective anchorage depth
<ul style="list-style-type: none"> Structures subject to dry internal conditions (zinc plated steel, stainless steel or high corrosion resistant steel) 	$h_{ef} \geq 30\text{mm}$ and $h_{ef,red} \geq 25\text{mm}$
<ul style="list-style-type: none"> Structures subject to permanently damp internal conditions, if no particular aggressive conditions exist (stainless steel or high corrosion resistant steel) 	$h_{ef} \geq 30\text{mm}$ and $h_{ef,red} \geq 25\text{mm}$
<ul style="list-style-type: none"> Structures subject to external atmospheric exposure including industrial and marine environment, if no particular aggressive conditions exist (stainless steel or high corrosion resistant steel) 	$h_{ef} \geq 30\text{mm}$
<ul style="list-style-type: none"> Structures subject to external atmospheric exposure and to permanently damp internal conditions, if other particular aggressive conditions exist (high corrosion resistant steel) 	$h_{ef} \geq 30\text{mm}$

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used.)

Design:

- Fastenings are designed under the responsibility of an engineer experienced in fastenings and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be fastened. The position of the fastener is indicated on the design drawings (e.g. position of the fastener relative to reinforcement or to supports, etc.).
- Design of fastenings according to EN 1992-4:2018, simplified design method C
- Fasteners are only to be used for redundant non-structural systems.

Installation:


- Drill hole by hammer drilling or vacuum drilling.
- Installation only as supplied by the manufacturer, without replacement of individual parts.
- Fastener installation such that the effective setting depth is complied with. This compliance is ensured, if the admissible thickness of fixture is kept or the loop of Nail Anchor N-O rests on the concrete surface.

Nail Anchor N	Annex B1
Intended Use Specifications	

Table B1: Installation parameters

Fastener type		N6 N-K N-O	N8 N-M	N6 N-K N-O	N8 N-M	
Effective anchorage depth	$h_{ef} \geq$	[mm]	25 ¹⁾		30	
Nominal drill hole diameter	d_0	[mm]	6		6	
Cutting diameter to drill bit	$d_{cut} \leq$	[mm]	6,40		6,40	
Depth of drill hole	$h_1 \geq$	[mm]	35		40	
Diameter of clearance hole in the fixture	$d_f \leq$	[mm]	7	9	7	9
Maximum tightening torque (N 6 and N 8)	$T_{inst} \leq$	[Nm]	4		4	
Minimum member thickness	h_{min}	[mm]	80		80	

¹⁾ Internal use only

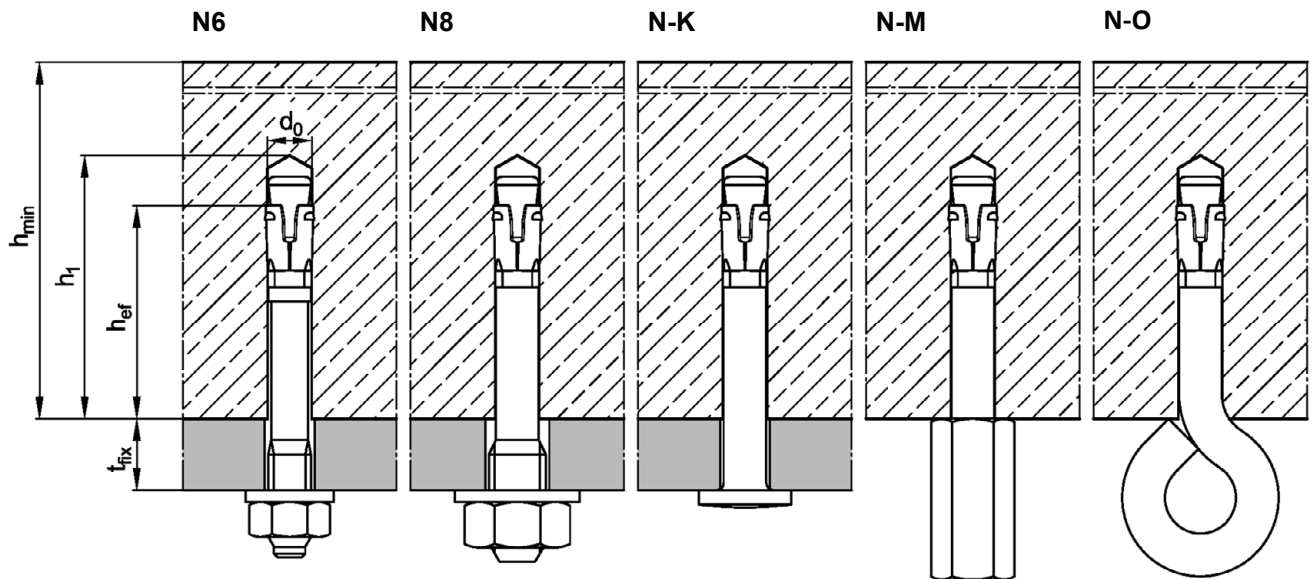

Nail Anchor N

Intended Use
Installation parameters

Annex B2

Installation instructions

All fastener types				
1		Drill hole perpendicular to the concrete surface by hammer drilling or vacuum drilling.		
2		Blow out dust. Alternatively, vacuum clean down to the bottom of the hole.		
	N6 / N8 Thread M6 / M8	N-K Nail head	N-M Coupling nut	N-O Loop
3		-		-
Check position of nut.				
4				
Drive in fastener.				
5				
Apply installation torque $T_{inst} \leq 4 \text{ Nm}$.		Installation condition		

Nail Anchor N

Intended Use
Installation instructions

Annex B3

Table C1: Characteristic resistance for a fixing point ¹⁾, all directions, design method C

Fastener type			N6	N8 N-K N-M	N-O	N6	N8 N-K N-M	N-O
Effective anchorage depth		h_{ef} [mm]	25			30		
Optimized for maximum load								
Characteristic resistance	C12/15	F_{Rk} [kN]	3,0	3,0	1,5	4,0	4,0	1,5
	C20/25 to C50/60		4,5	4,5	1,5	5,9	5,9	1,5
Respective spacing between fixing points ^{1) 2)}		s_{cr} [mm]	100					
		for $c_{cr} \geq$ [mm]	200					
Respective edge distance ²⁾		c_{cr} [mm]	100					
		for $s_{cr} \geq$ [mm]	200					
Partial factor		γ_M	1,5					
Optimized for minimum edge distance								
Characteristic resistance	C12/15	F_{Rk} [kN]	1,5	1,5	1,5	2,0	2,0	1,5
	C20/25 to C50/60		2,0	2,0	1,5	2,5	2,5	1,5
Respective spacing between fixing points ^{1) 2)}		c_{cr} [mm]	50					
		for $s_{cr} \geq$ [mm]	100					
Partial factor		γ_M	1,5					
Shear load with lever arm								
Characteristic bending resistance, steel, zinc plated		$M^0_{Rk,s}$ [Nm]	9,2	12,7	³⁾	9,2	12,7	³⁾
Characteristic bending resistance, stainless steel A4 / HCR		$M^0_{Rk,s}$ [Nm]	9,2	13,5	³⁾	9,2	13,5	³⁾
Partial factor		γ_{Ms}	1,25					

¹⁾ A fixing point is defined as:

- Single fastener
- Fastener group with a minimum spacing s of $50 \text{ mm} \leq s < s_{cr}$

If the spacing in a fixing point is greater than or equal to the respective spacing in this table, the characteristic resistances apply to every single fastener.

²⁾ Intermediate values can be linearly interpolated

³⁾ No performance assessed.

Nail Anchor N

Performances
Characteristic resistance

Annex C1

Table C2: Characteristic resistance for a fixing point ¹⁾ under fire exposure in concrete C20/25 to C50/60, design method C

Fire resistance class			Fastener type								
			N6 N8	N-K	N-M ³⁾	N-O	N6 N8	N-K	N-M ³⁾	N-O	
Effective anchorage depth		h_{ef}	[mm]	25				30			
Load in any direction											
R 30	Characteristic resistance, steel zinc plated	F _{Rk,fi}	[kN]	0,6	0,6	0,6	0,2	0,9	0,9	0,8	-
R 60				0,6	0,6	0,6	0,2	0,7	0,8	0,7	-
R 90				0,5	0,6	0,6	0,1	0,5	0,6	0,6	-
R 120				0,4	0,5	0,5	0,1	0,4	0,5	0,6	-
R 30	Characteristic resistance, stainless steel A4 / HCR	F _{Rk,fi}	[kN]	0,6	0,6	0,6	0,2	0,9	0,9	0,8	0,2
R 60				0,6	0,6	0,6	0,2	0,9	0,9	0,7	0,2
R 90				0,5	0,6	0,6	0,1	0,9	0,9	0,6	0,1
R 120				0,4	0,5	0,5	0,1	0,7	0,7	0,6	0,1
R 30 - R 120	Edge distance	C _{cr,fi}	[mm]	50				50			
	Spacing	S _{cr,fi}	[mm]	100				100			
Shear load with lever arm											
R 30	Characteristic resistance, steel zinc plated	M ⁰ _{Rk,fi}	[Nm]	0,7	1,0	0,7	²⁾	0,7	1,0	0,7	²⁾
R 60				0,5	0,8	0,7	²⁾	0,5	0,8	0,7	²⁾
R 90				0,4	0,5	0,6	²⁾	0,4	0,5	0,6	²⁾
R 120				0,3	0,4	0,5	²⁾	0,3	0,4	0,5	²⁾
R 30	Characteristic resistance, stainless steel A4 / HCR	M ⁰ _{Rk,fi}	[Nm]	1,4	2,1	0,7	²⁾	1,4	2,1	0,7	²⁾
R 60				1,1	1,5	0,7	²⁾	1,1	1,5	0,7	²⁾
R 90				0,7	1,0	0,6	²⁾	0,7	1,0	0,6	²⁾
R 120				0,5	0,7	0,5	²⁾	0,5	0,7	0,5	²⁾
If the fire attack is from more than one side, the edge distance shall be ≥ 300 mm											

¹⁾ A fixing point is defined as:

- Single fastener,
- Fastener group with a minimum spacing s of $50 \text{ mm} \leq s < s_{cr}$

If the spacing in a fixing point is greater than or equal to the respective spacing in this table, the characteristic resistances apply to every single fastener

²⁾ No performance assessed

³⁾ Only in connection with threaded rods M8, M10 or M12 minimum strength class 5.8.

Nail Anchor N

Performances
Characteristic resistance under fire exposure

Annex C2